



### Typical Performance

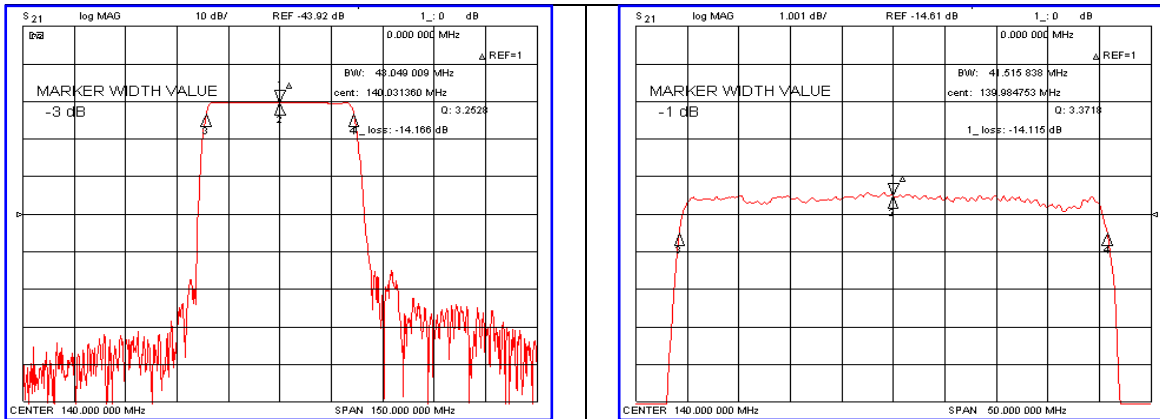


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	139.80	140.00	140.20
Insertion Loss	dB	-	14.20	16.00
1dB Bandwidth	MHz	-	41.51	-
3dB Bandwidth	MHz	42.50	43.04	-
40dB Bandwidth	MHz	-	49.91	52.00
Passband Ripple(Fc ± 18MHz)	dB	-	0.55	1.00
Group Delay Variation(Fc ± 18MHz)	nsec	-	30	50
Absolute Delay	µsec	-	0.64	-
Ultimate Attenuation	dB	40	45	-
Substrate Material	-	Yz-LiNbO <sub>3</sub>		
Temperature Coefficient	ppm/°C	-86		

### Package Dimension

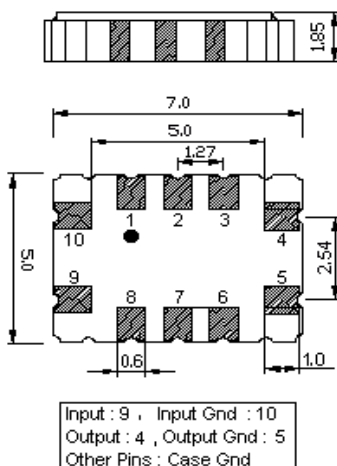

### Matching Configuration

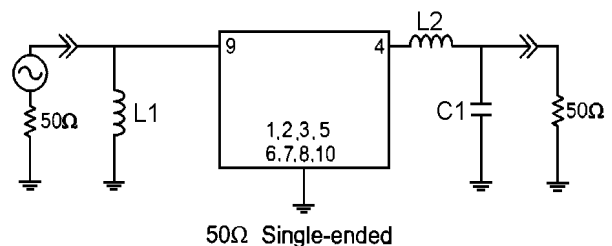

L1=47nH, L2=47nH, C=12pF  
Source / Load Impedance = 50Ω  
Ambient Temperature = 25°C

Rev.0 100621

