



Typical Performance

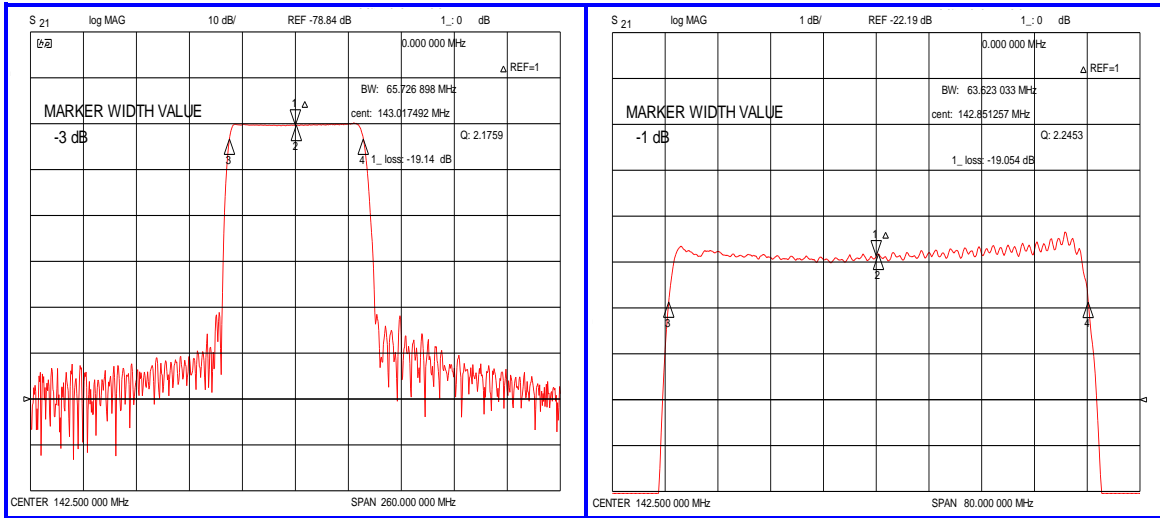


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency(at -1dB)	MHz	-	142.50	-
Insertion Loss	dB	-	19.00	21.00
1dB Bandwidth	MHz	63.00	63.60	-
3dB Bandwidth	MHz	-	65.72	-
40dB Bandwidth	MHz	-	75.00	76.00
Attenuation	MHz	35	42	-
Amplitude Ripple	dB	-	0.60	1.00
Group Delay Variation	nsec	-	20	40
Absolute Delay	µsec	-	0.46	-
Substrate Material & T.C.F	ppm/°C	128-LiNbO ₃ & -72		
Package	mm	13 X 6.5		

Package Dimension

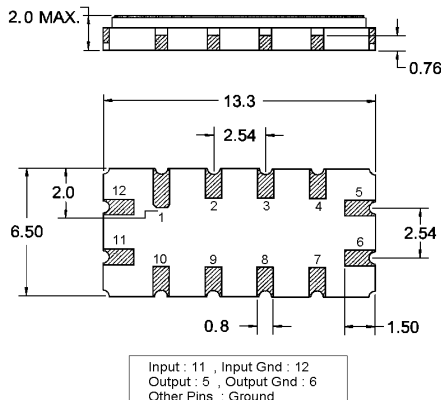

Matching Configuration

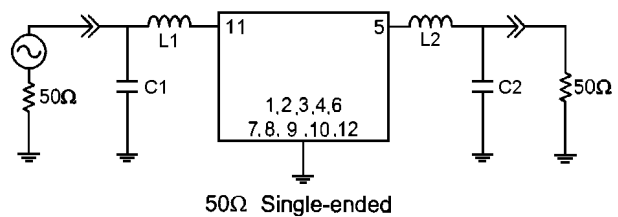

L1=47nH, L2=47nH, C1=26pF, C2=9pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev0.160126

