



### Typical Performance

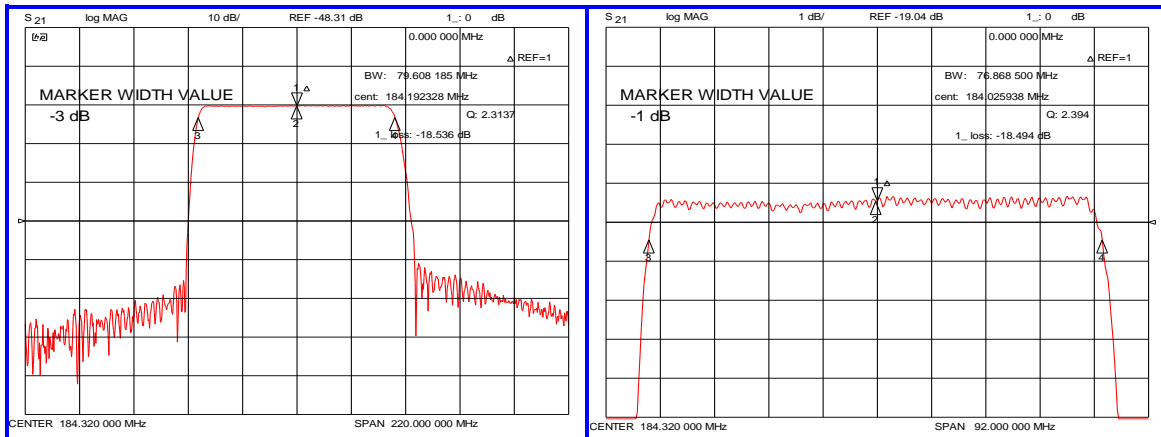


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	184.32	-
Insertion Loss	dB	-	18.50	20.50
1dB Bandwidth	MHz	76.00	77.21	-
3dB Bandwidth	MHz	79.00	79.82	-
40dB Bandwidth	MHz	-	93.00	100.00
Attenuation				
12 ~ 123MHz		40	45	-
258 ~ 369MHz	dB	40	45	-
500 ~ 1000MHz		25	35	-
1000 ~ 3000MHz		15	23	-
Amplitude Ripple	dB	-	0.50	1.2
Group Delay Variation (90% of 3db bandwidth)	nsec	-	10	30
Phase linearity (90% of 3db bandwidth)	Deg	-	20	-
Absolute Delay	µsec	-	0.43	-
Temperature Coefficient	ppm/°C		-86	







### Package Dimension




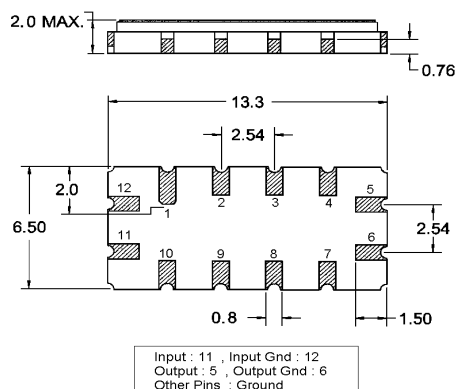


### Matching Configuration

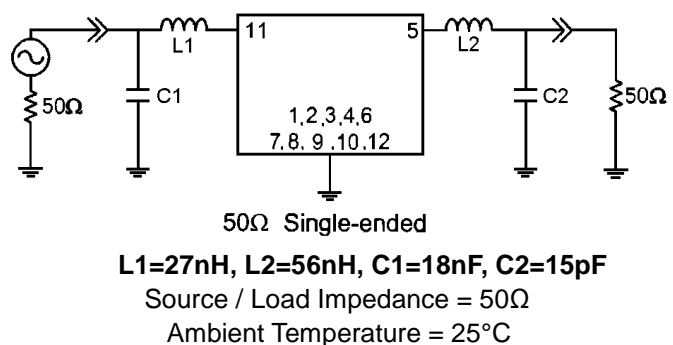

Rev.0 140819

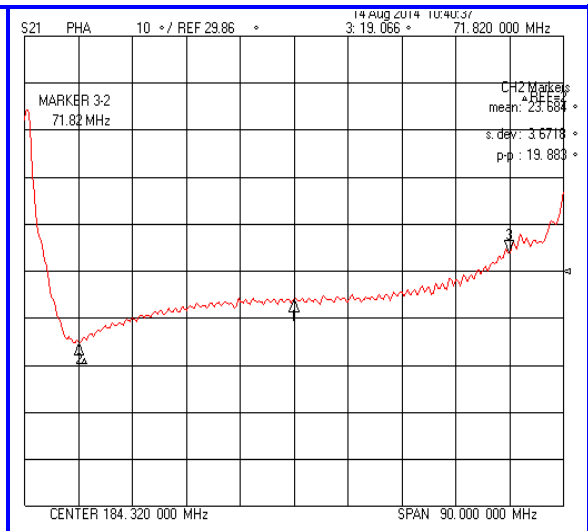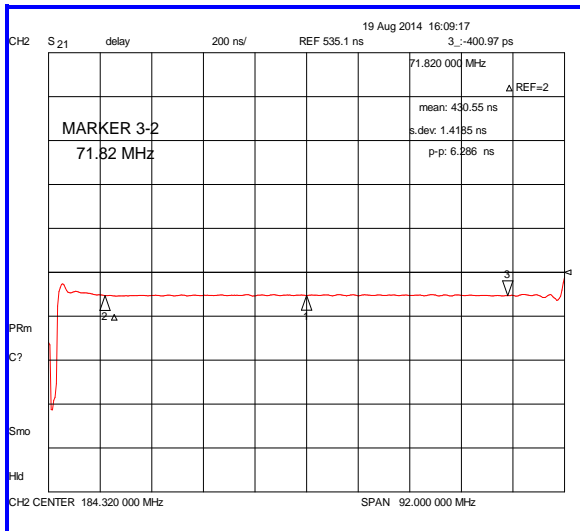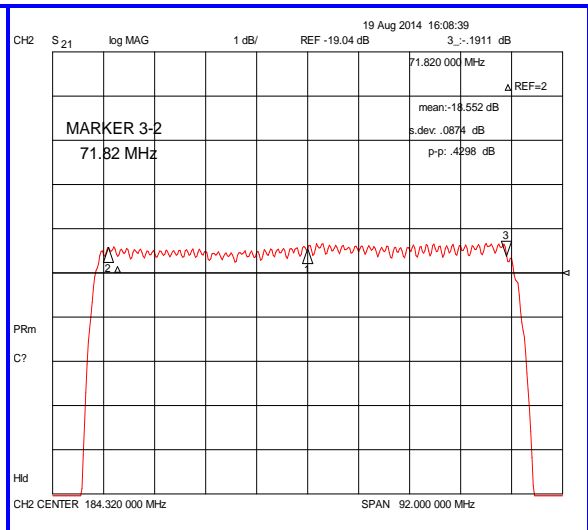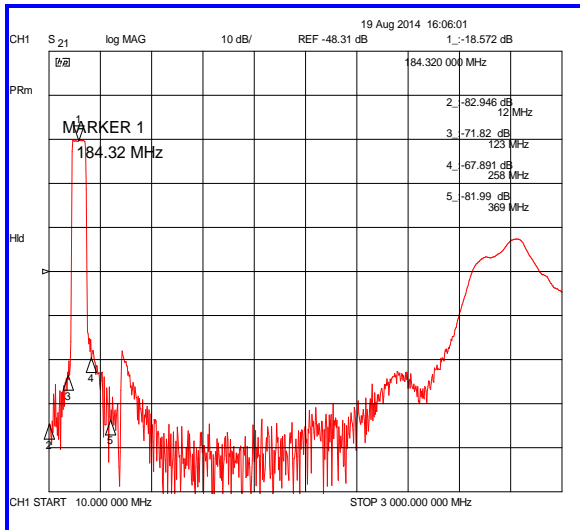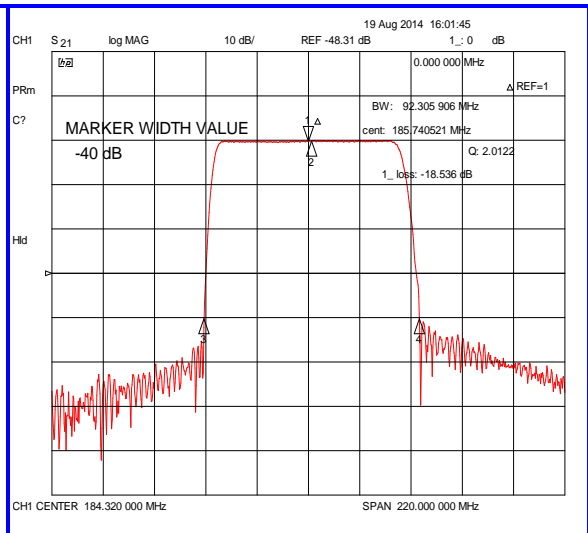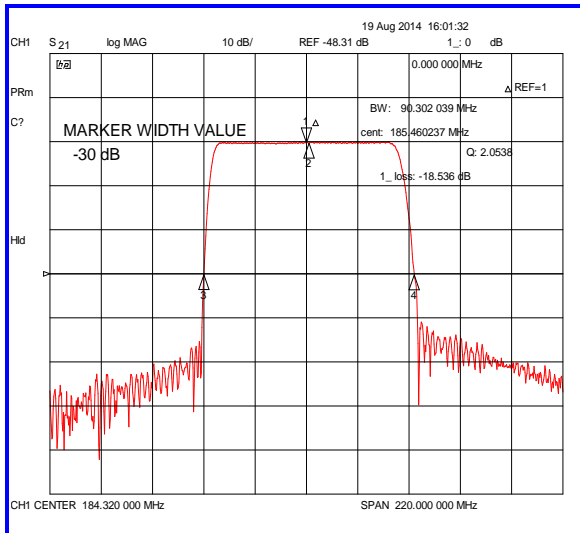

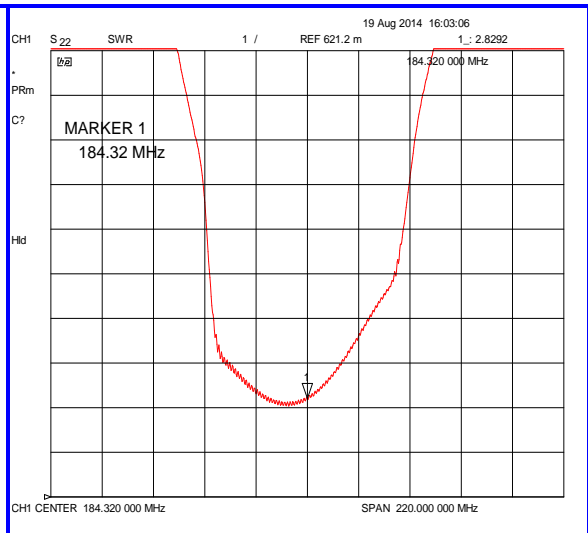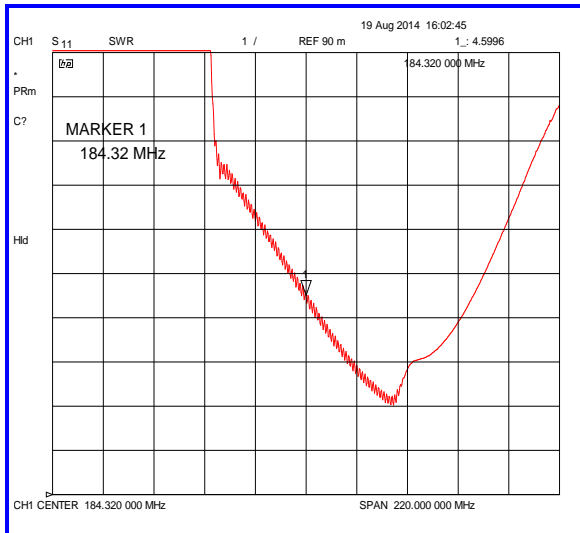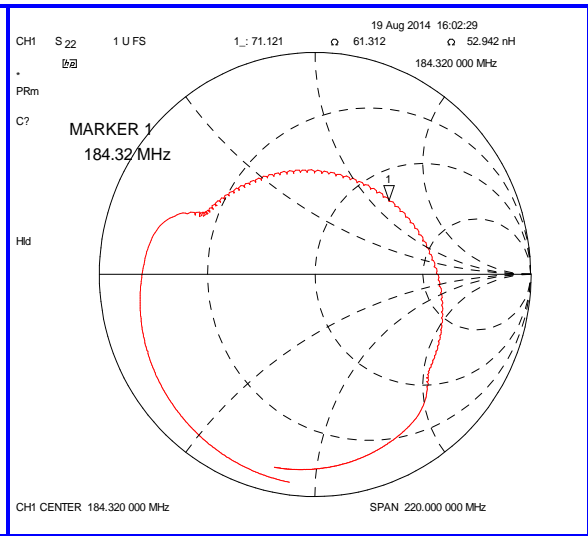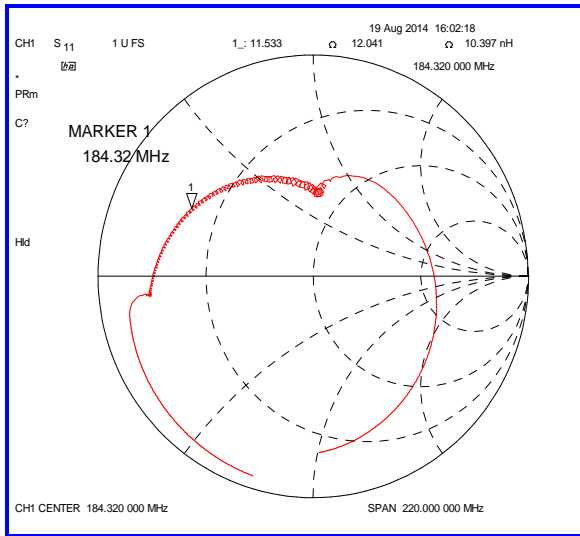

[www.ctech.co.kr](http://www.ctech.co.kr)