


Specification



Parameter	Unit	Specifcaiton
Center Frequency	MHz	184.32
Bandwidth	MHz	135.18 ~ 233.46
Insertion Loss in B.W	dB	3.0 (Max)
Ripple in B.W	dB	1.5 (Max)
Return Loss in B.W	dB	15.0 (Min)
Attenuation	dB	45.0 (Min) @ DC~110.58MHz 35.0 (Min) @ 258.06 MHz 20.0 (Min) @ 123.46 MHz 10.0 (Min) @ 243.46 MHz
Group Delay Variation	nsec	50.0 (Max)
Input Power	Watt	1.0 (Max)
IN/OUT Impedance	$\Omega$	50
Operating Temp. Range	$^{\circ}\text{C}$	-30 ~ +85

Dimension

TOP VIEW

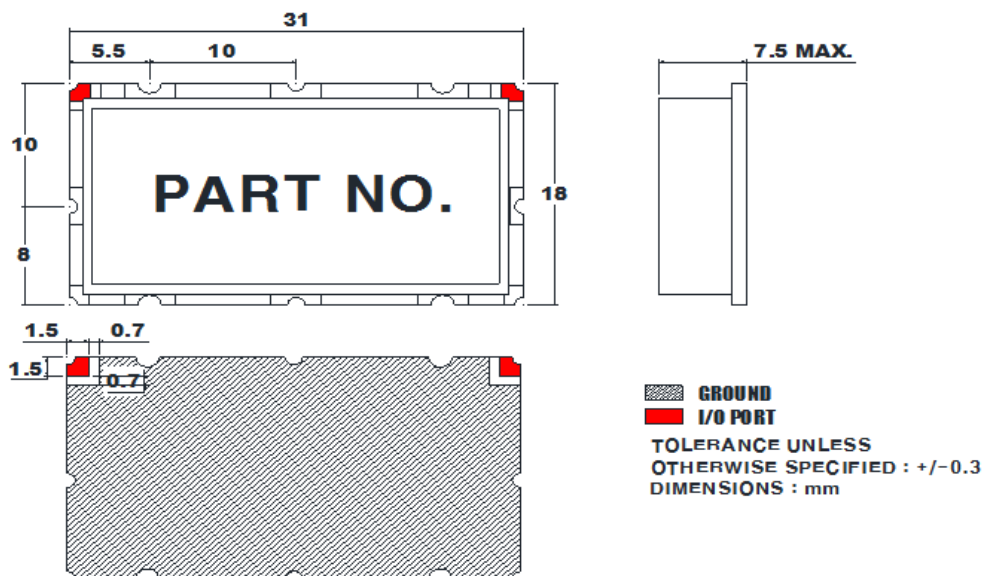

# Plot data

