



### Typical Performance

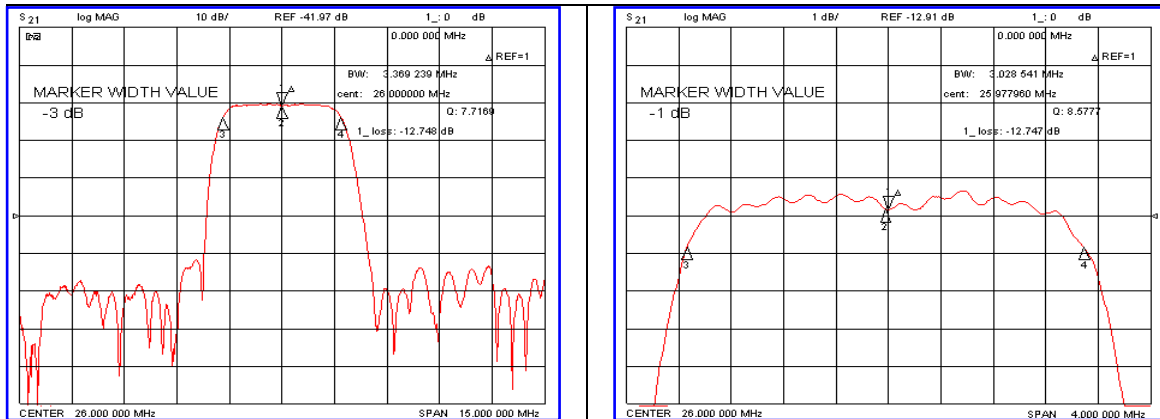

### Specification


Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	25.92	26.00	26.08
Insertion Loss	dB	-	12.74	15.00
1dB Bandwidth	MHz	-	3.02	-
3dB Bandwidth	MHz	3.20	3.36	-
40dB Bandwidth	MHz	-	4.70	5.00
Passband Ripple	dB	-	0.62	1.00
Group Delay Variation	nsec	-	160	250
Absolute Delay	µsec	-	2.07	-
Ultimate Attenuation	dB	40	43	-
Substrate Material	-	128-LiNbO <sub>3</sub>		
Temperature Coefficient	ppm/°C	-72		

### Package Dimension

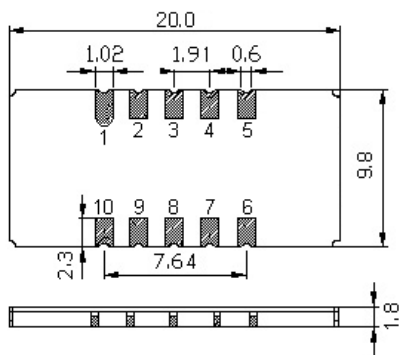

10: Input, 1: In-Gnd  
 5: Output, 6: Out-Gnd  
 2,3,4,7,8,9: Case Gnd

### Matching Configuration

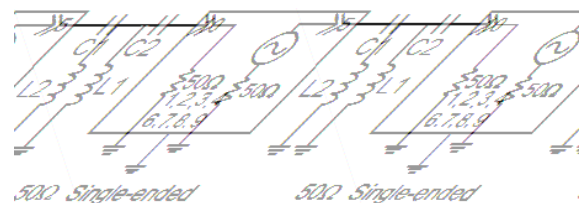

L1=L2=220nH, C1=C2=330pF  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C

Rev0. 071112

