



Typical Performance

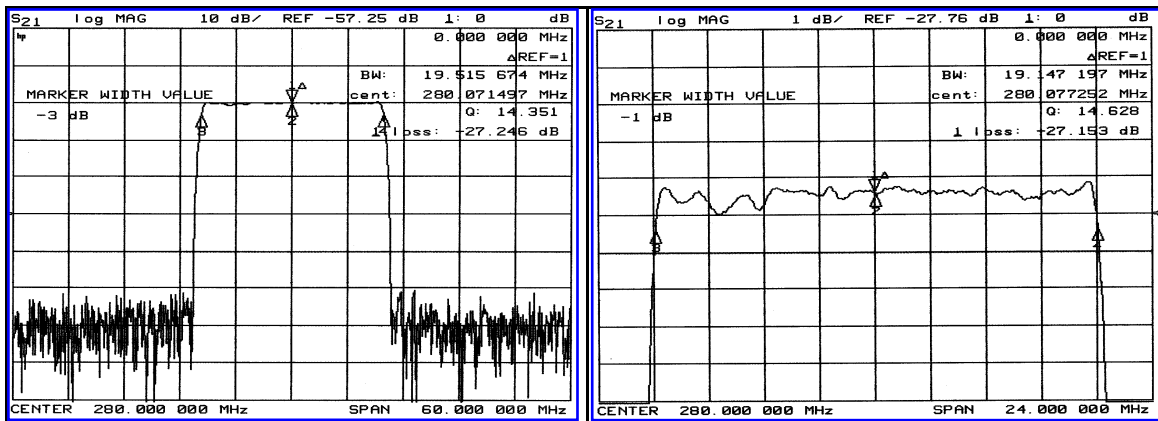


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	279.80	280.0	280.20
Insertion Loss	dB	-	27.50	30.00
1dB Bandwidth	MHz	-	19.14	-
3dB Bandwidth	MHz	19.4	19.51	-
40dB Bandwidth	MHz	-	21.12	21.40
Passband Ripple	dB	-	0.70	1.20
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	2.37	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	LiTaO3		
Temperature Coefficient	ppm/°C	-23		

Package Dimension






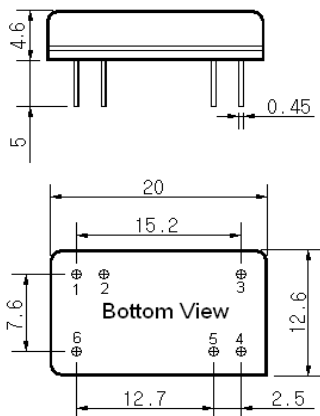


Matching Configuration

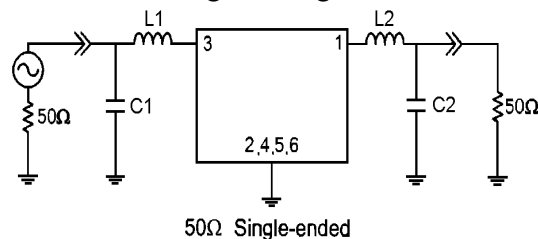

L1=10nH , L2=9.5nH, C1=39pF, C2=36pF
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

07/13/2005

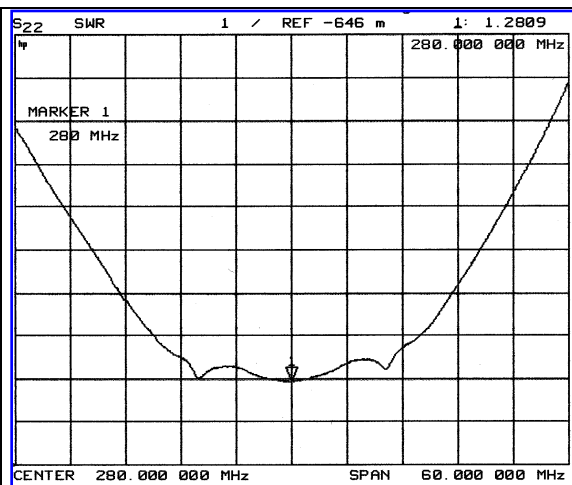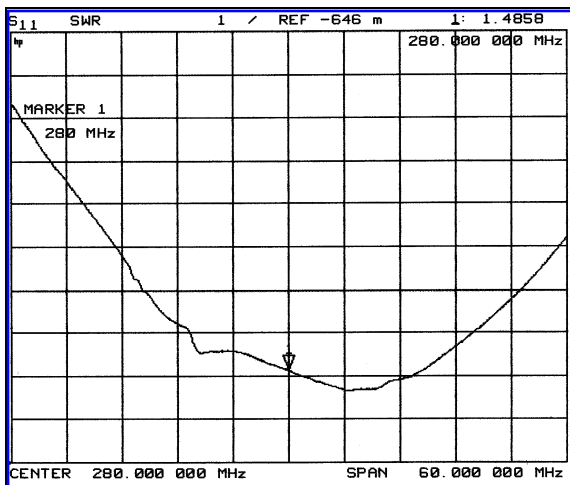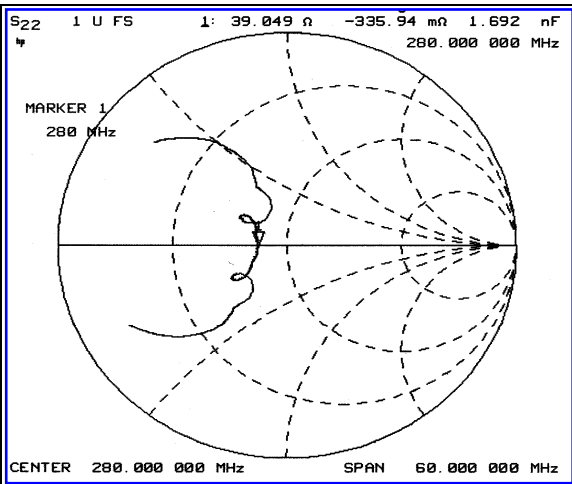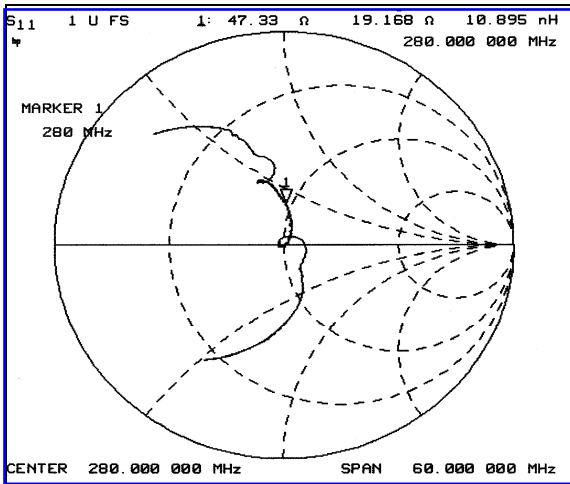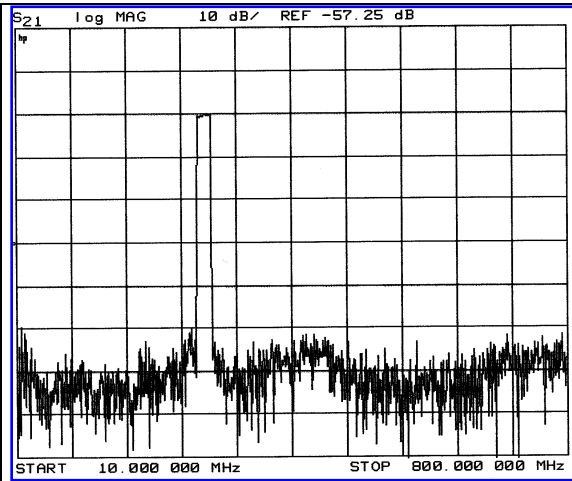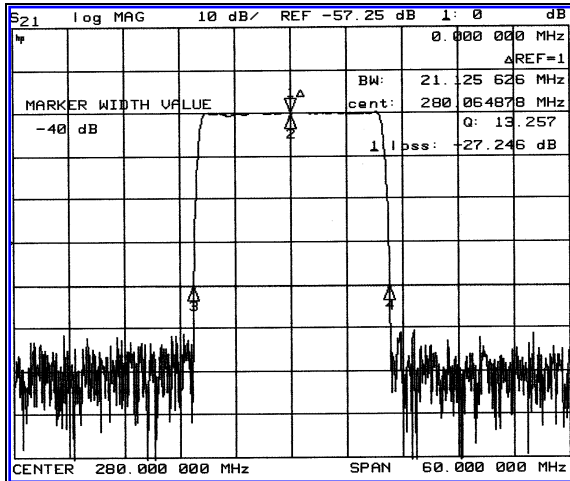

www.ctech.co.kr