



Typical Performance

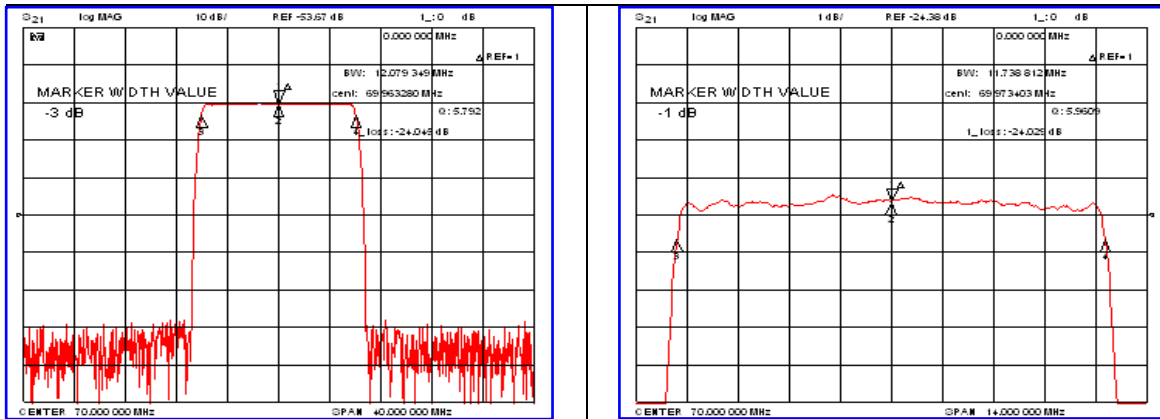


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	24.04	25.50
1dB Bandwidth	MHz	-	11.73	-
3dB Bandwidth	MHz	11.95	12.07	-
40dB Bandwidth	MHz	-	13.46	13.60
Passband Ripple	dB	-	0.50	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	μsec	-	2.30	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	128- LiNbO ₃		
Temperature Coefficient	ppm/°C	-72		

Package Dimension

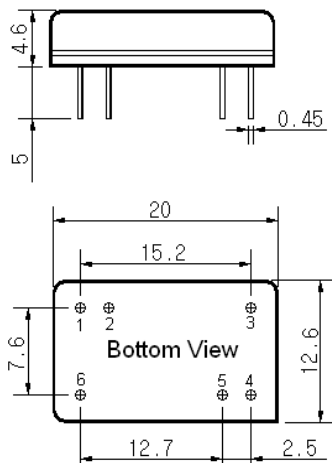

Matching Configuration

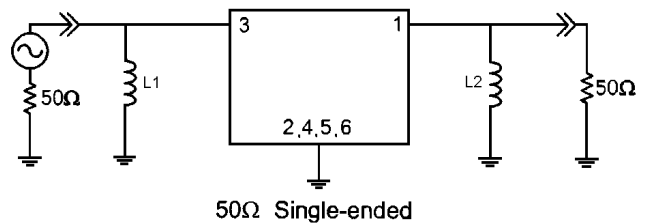

L1=470nH, L2=470nH
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

Rev0. 080821

