



### Typical Performance

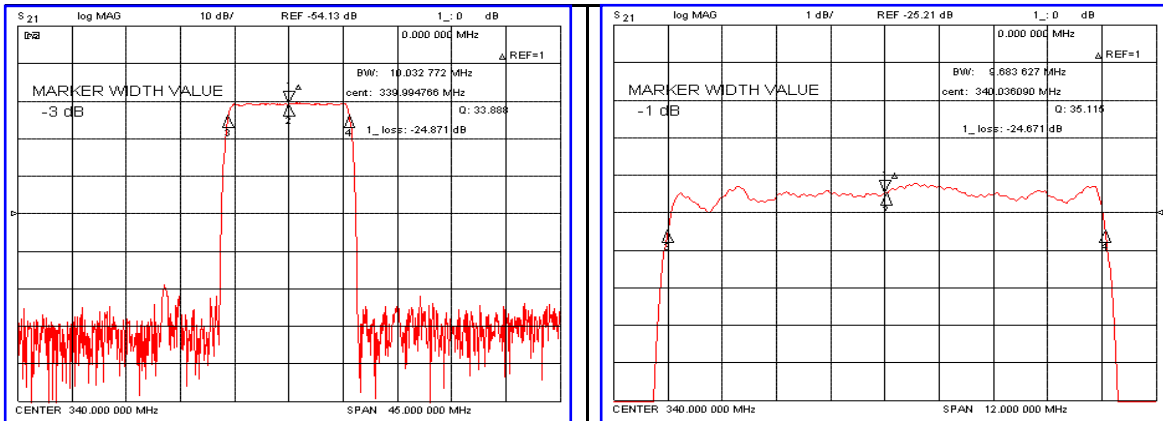


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency (fo)	MHz	-	340.00	-
Insertion Loss	dB	-	24.80	26.00
1dB Bandwidth	MHz	9.46	9.68	-
3dB Bandwidth	MHz	-	10.03	-
40dB Bandwidth	MHz	-	11.32	11.46
Passband Ripple (fo+/-4.73MHz)	dB	-	0.80	1.20
Group Delay Variation (fo+/-4.73MHz)	nsec	-	65	85
Absolute Delay	µsec	-	2.80	-
Relative Attenuation fo +/-5.73MHz	dB	45	50	-
Substrate Material	-	LiTaO <sub>3</sub>		
Temperature Coefficient	ppm/°C	-20		

### Package Dimension

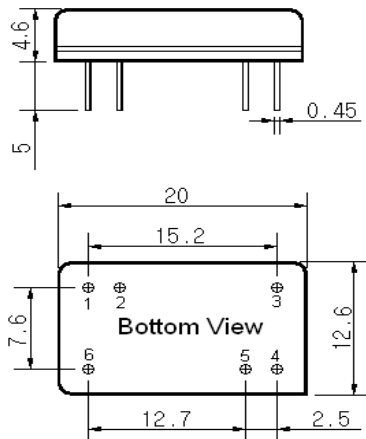

### Matching Configuration

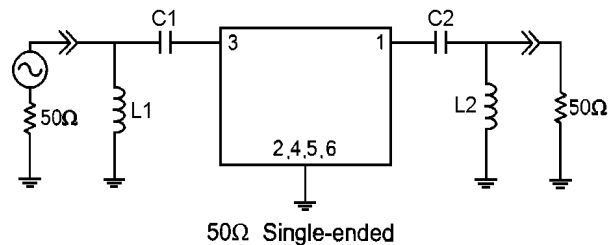

C1=C2=22pF, L1=10nH, L2=10nH  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C

Rev 0. 070406

