
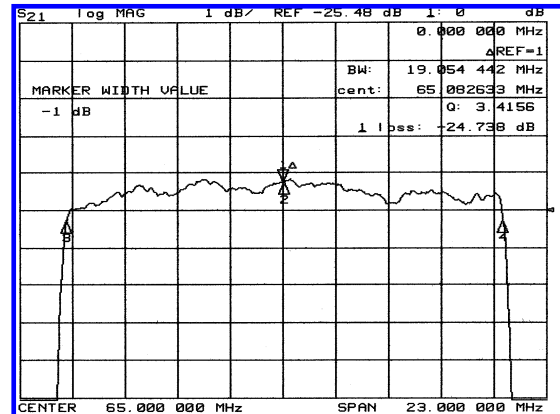



Typical Performance

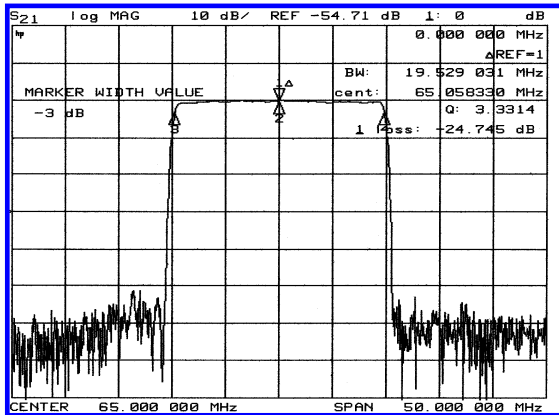


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	Mhz	64.92	65.00	65.08
Insertion Loss	dB		24.50	25.50
1dB Bandwidth	Mhz	18.90	19.05	
3dB Bandwidth	Mhz	19.45	19.52	
50dB Bandwidth	Mhz		21.15	21.30
Passband Ripple	dB		0.85	1.00
Group Delay Variation	nsec		50	100
Absolute Delay	µsec		2.20	
Ultimate Attenuation	dB	50	55	
Substrate Material	-		128 LiNbO ₃	

Package Dimension

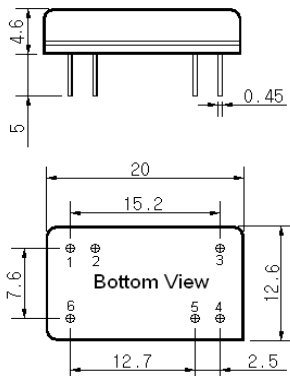

Matching Configuration

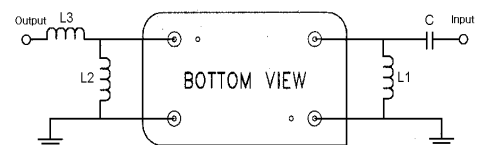

L1=154.7nH, L2=0.82µH, L3=0.82µH, C=36pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C