



Typical Performance

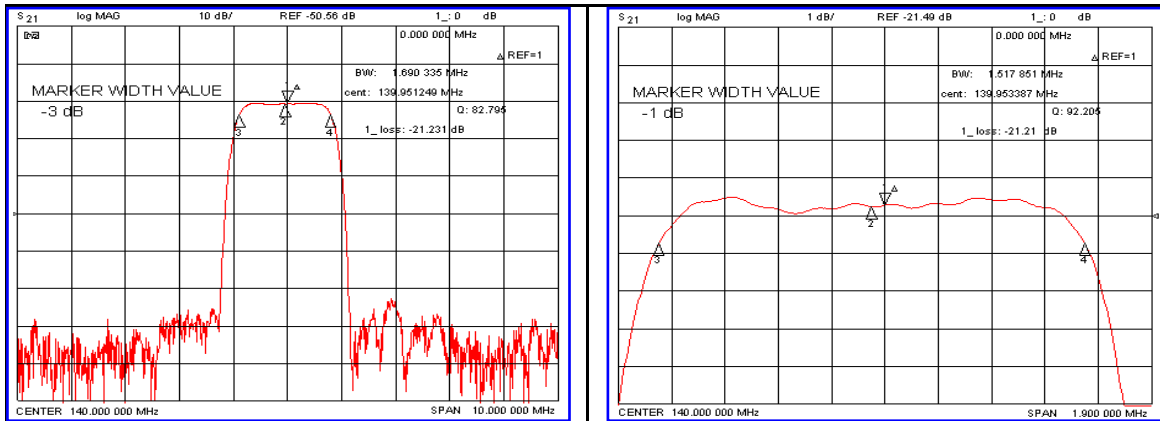


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	139.85	140.00	140.15
Insertion Loss	dB	-	21.50	24.00
1dB Bandwidth	MHz	-	1.51	-
3dB Bandwidth	MHz	1.60	1.69	-
50dB Bandwidth	MHz	-	2.36	2.50
Passband Ripple	dB	-	0.50	1.00
Group Delay Variation	nsec	-	150	250
Absolute Delay	µsec	-	3.50	-
Ultimate Attenuation	dB	48	52	
Substrate Material	-	Quartz		
Temperature Coefficient	ppm/°C ²	-0.03		

Package Dimension

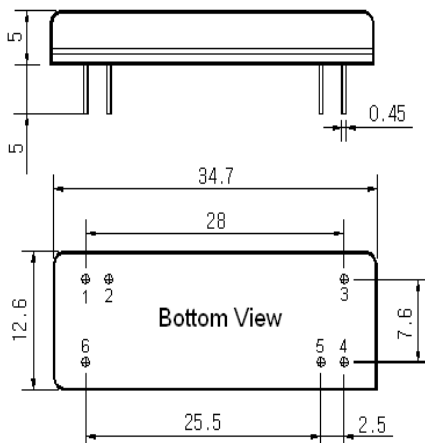

Matching Configuration

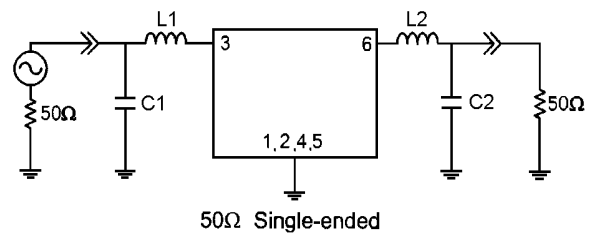

L1=33nH, L2=27nH, C1=47pF, C2=47pF
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

Rev0. 070615

