



### Typical Performance

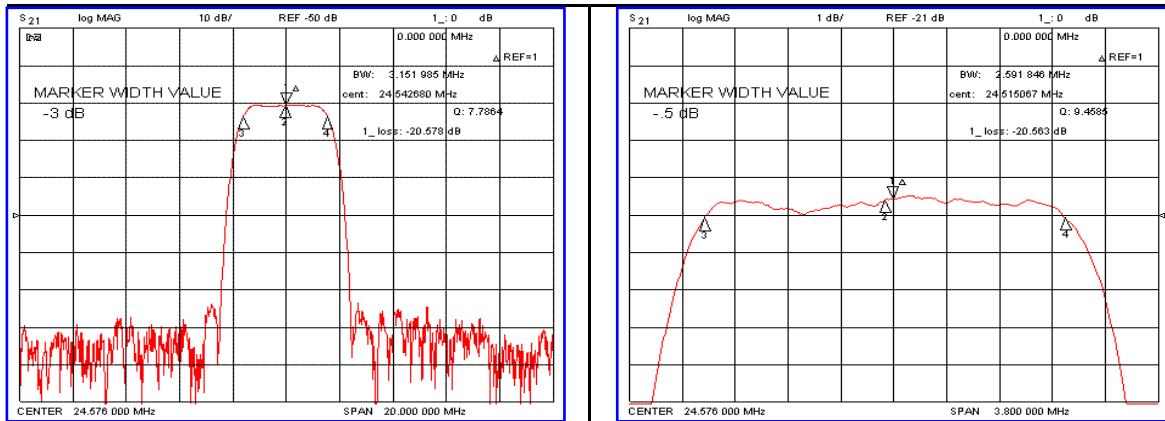


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency (Fc)	MHz	24.506	24.576	24.646
Insertion Loss	dB	-	20.70	23.00
0.5dB Bandwidth	MHz	2.50	2.59	-
3dB Bandwidth	MHz	-	3.15	-
50dB Bandwidth	MHz	-	4.81	5.00
Passband Ripple	dB	-	0.55	1.00
Group Delay Variation	nsec	-	110	200
Absolute Delay	μsec	-	2.88	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	128-LiNbO <sub>3</sub>		
Temperature Coefficient	ppm/°C	-72		

### Package Dimension

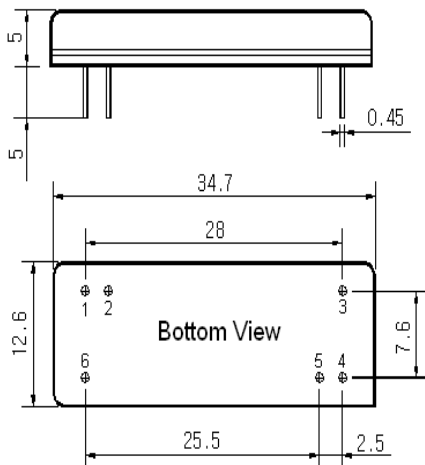

### Matching Configuration

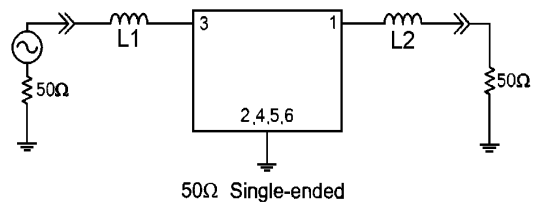

L1=390nH, L2=220nH  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C

