



Typical Performance

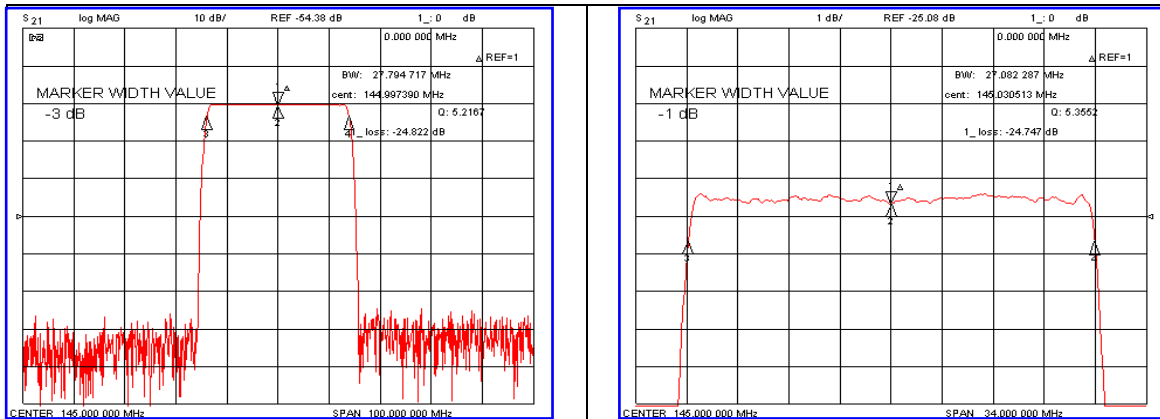


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	145.00	-
Insertion Loss	dB	-	25.00	26.50
1dB Bandwidth	MHz	26.90	27.08	-
3dB Bandwidth	MHz	-	27.79	-
40dB Bandwidth	MHz	-	30.95	31.10
Passband Ripple($F_c \pm 12.48\text{MHz}$)	dB	-	0.40	1.00
Group Delay Variation($F_c \pm 12.48\text{MHz}$)	nsec	-	30	50
Absolute Delay	μsec	-	1.15	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	128-LiNbO ₃		
Temperature Coefficient	ppm/ $^{\circ}\text{C}$	-72		

Package Dimension

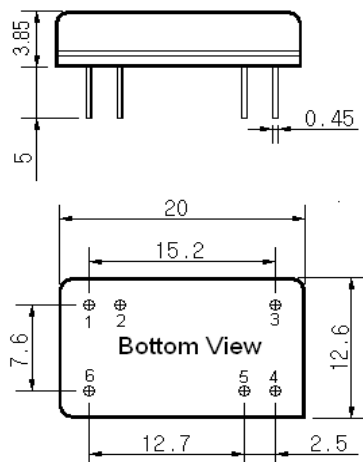

Matching Configuration

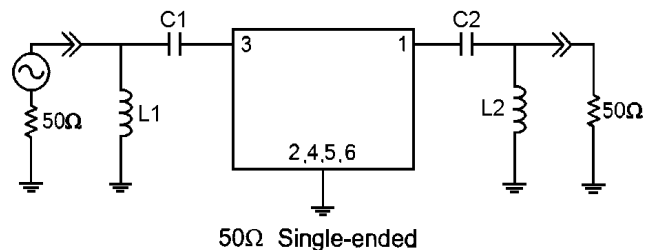

L1=82nH, L2=100nH, C1=82pF, C2=82pF
 Source / Load Impedance = 50 Ω
 Ambient Temperature = 25 $^{\circ}\text{C}$

Rev0. 090316

