



Typical Performance

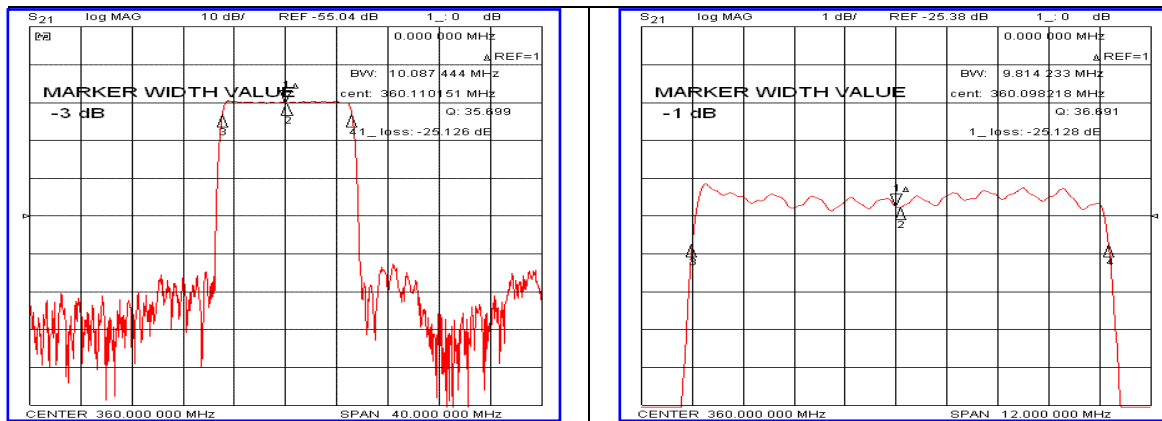


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	360.00	-
Insertion Loss	dB	-	25.20	27.00
1dB Bandwidth	MHz	9.60	9.81	-
5dB Bandwidth	MHz	-	10.26	-
15dB Bandwidth	MHz	-	10.75	-
25dB Bandwidth	MHz	-	11.02	-
40dB Bandwidth	MHz	-	11.26	11.40
Passband Ripple(Fc±4.5MHz)	dB	-	0.75	1.40
Absolute Delay	µsec	-	1.60	-
Ultimate Attenuation	dB	40	43	-
Substrate Material	-	Quartz		

Package Dimension

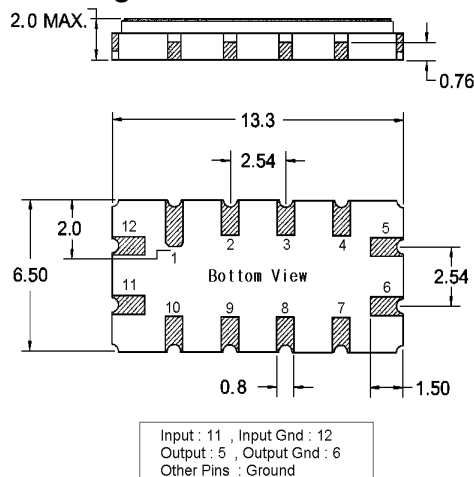

Matching Configuration

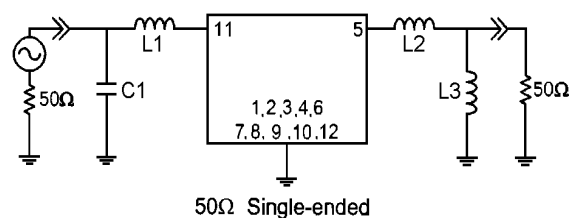

L1=15nH, L2=1.8nH, L3=3.9nH, C1=22pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev.0 120727

