



Typical Performance

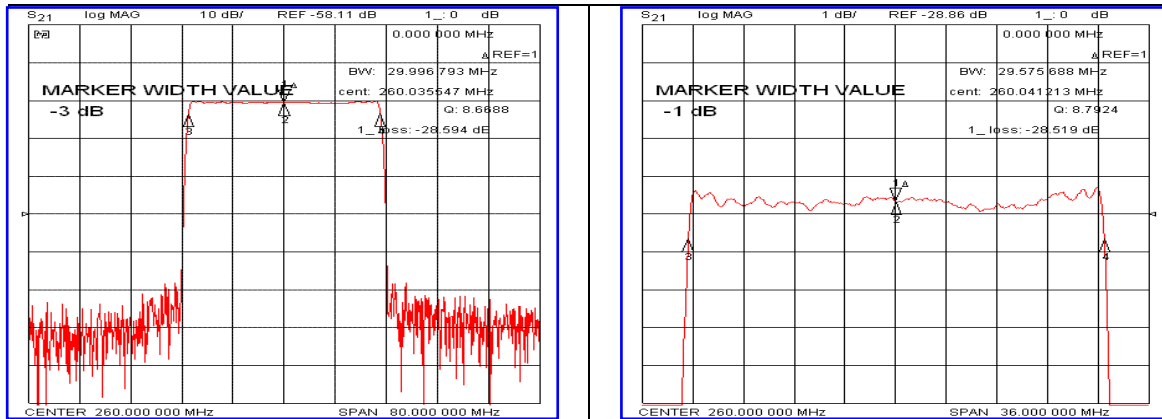


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	260.00	-
Insertion Loss	dB	-	28.80	31.00
1dB Bandwidth	MHz	29.30	29.57	-
5dB Bandwidth	MHz	-	30.28	-
15dB Bandwidth	MHz	-	31.07	-
25dB Bandwidth	MHz	-	31.55	-
40dB Bandwidth	MHz	-	32.00	32.20
Passband Ripple(Fc±14.22MHz)	dB	-	0.70	1.20
Absolute Delay	μsec	-	1.98	-
Ultimate Attenuation	dB	40	47	-
Temperature Coefficient	ppm/°C	-20		

Package Dimension

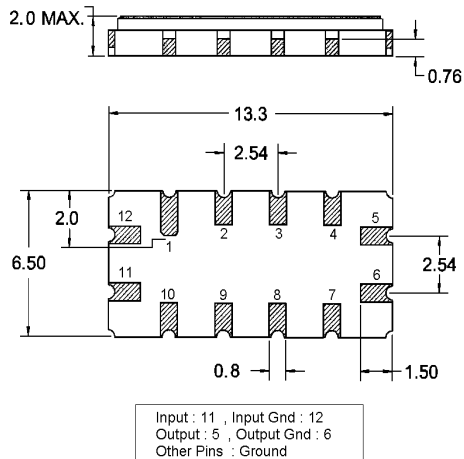

Matching Configuration

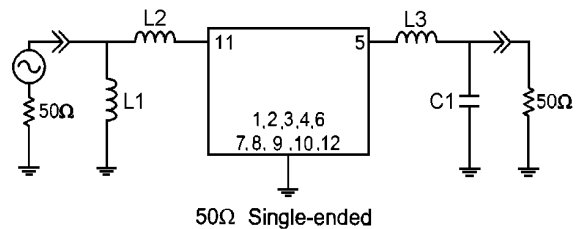

L1=6.8nH, L2=3.3nH, L3=18nH, C1=27pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev.1 120515

