



Typical Performance

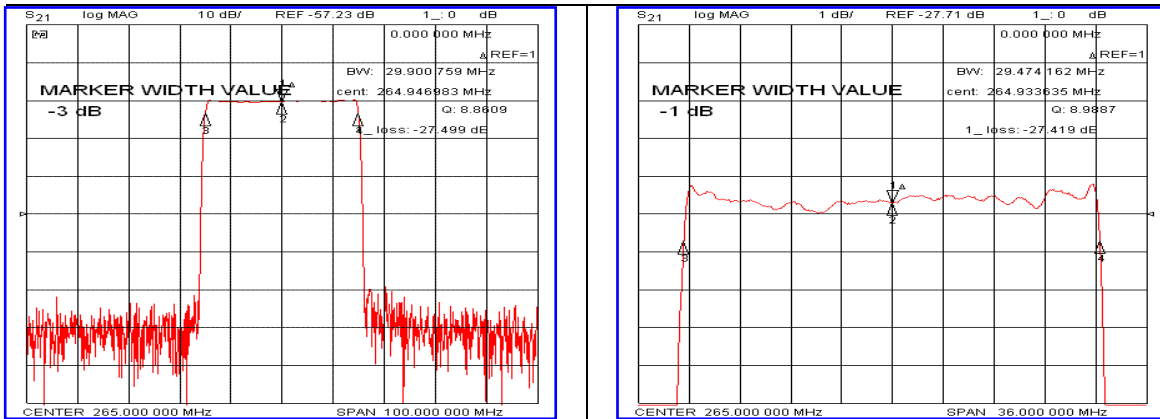


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	264.80	265.00	265.20
Insertion Loss	dB	-	27.50	30.00
1dB Bandwidth	MHz	29.30	29.47	-
5dB Bandwidth	MHz	-	30.20	-
15dB Bandwidth	MHz	-	31.00	-
25dB Bandwidth	MHz	-	31.45	-
40dB Bandwidth	MHz	-	31.95	32.15
Passband Ripple($F_c \pm 14.22\text{MHz}$)	dB	-	0.80	1.20
Absolute Delay	μsec	-	1.96	-
Ultimate Attenuation	dB	40	47	-
Temperature Coefficient	$\text{ppm}/^\circ\text{C}$	-20		

Package Dimension

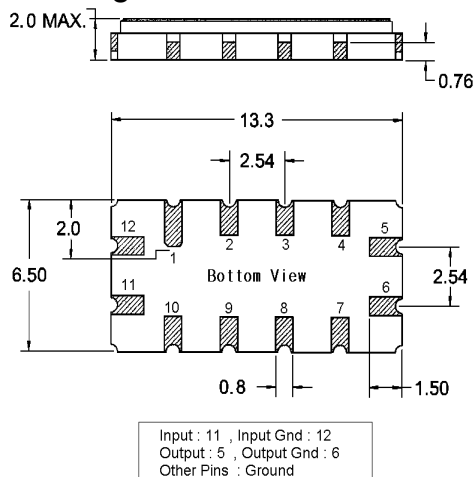

Matching Configuration

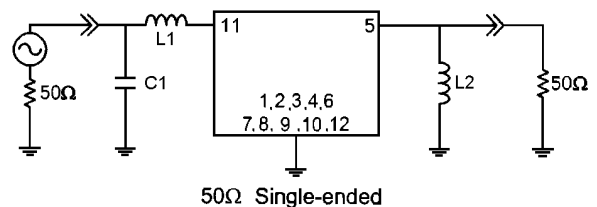

$L1=22\text{nH}$, $L2=15\text{nH}$, $C1=27\text{pF}$
Source / Load Impedance = 50 Ω
Ambient Temperature = 25 $^\circ\text{C}$

Rev.0 120629

