
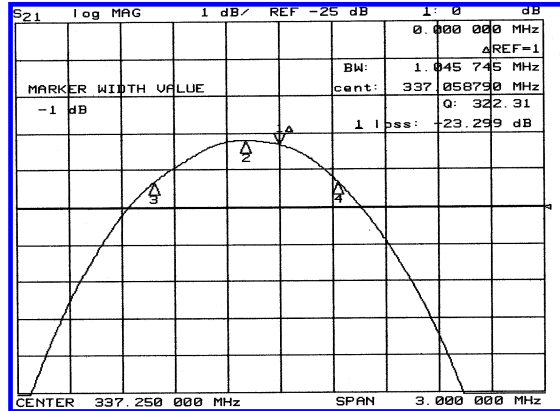



### Typical Performance

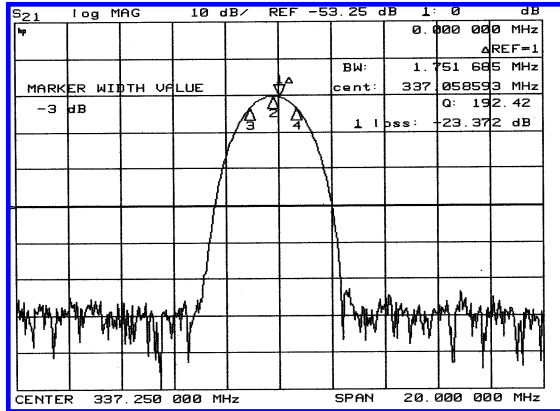


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	Mhz		337.25	
Insertion Loss	dB	-	23.5	25.0
1dB Bandwidth	Mhz	0.80	1.04	-
3dB Bandwidth	Mhz	1.50	1.75	-
40dB Bandwidth	Mhz	-	4.85	5.00
Passband Ripple	dB	-	0.50	1.00
Group Delay Variation	nsec	-	80	150
Absolute Delay	µsec		0.98	
Ultimate Attenuation	dB	50.0	55.0	
Substrate Material	-		Quartz	

### Package Dimension

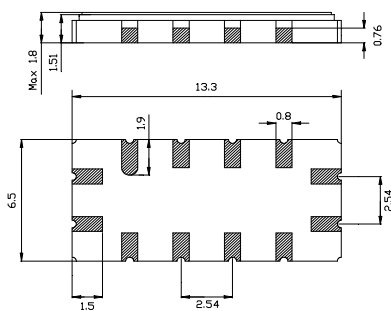

### Matching Configuration

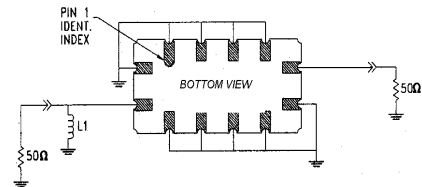

L1 = 22nH  
Source / Load Impedance = 50Ω  
Ambient Temperature = 25°C

09/02/2002