



Typical Performance

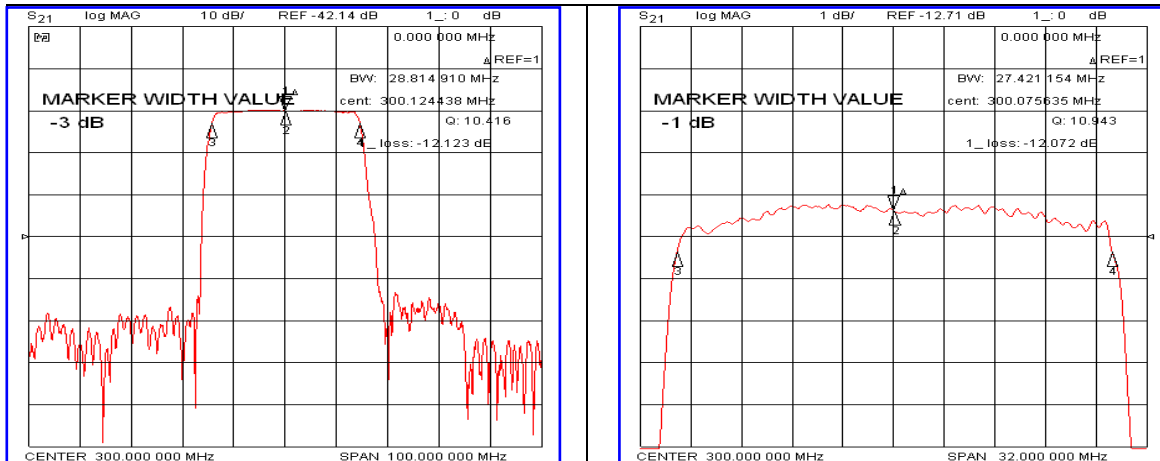


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	300.00	-
Insertion Loss	dB	-	12.20	14.00
1dB Bandwidth	MHz	27.00	27.42	-
3dB Bandwidth	MHz	-	28.81	-
40dB Bandwidth	MHz	-	34.43	35.00
Passband Ripple($F_c \pm 12\text{MHz}$)	dB	-	0.68	1.20
Group Delay Variation($F_c \pm 12\text{MHz}$)	nsec	-	50	100
Absolute Delay	μsec	-	0.63	-
Ultimate Attenuation	dB	40	45	-
Substrate Material	-	Yz-LiNbO ₃		
Temperature Coefficient	ppm/ $^{\circ}\text{C}$	-86		

Package Dimension

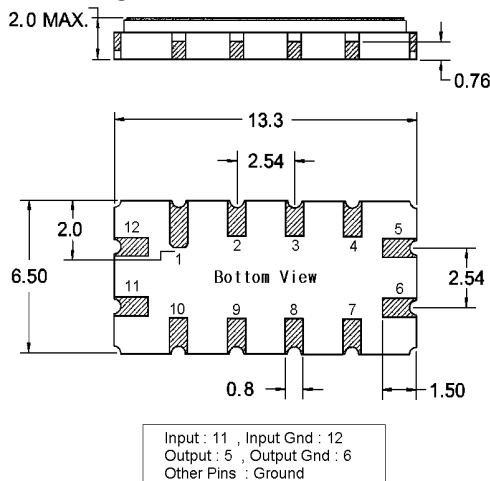

Matching Configuration

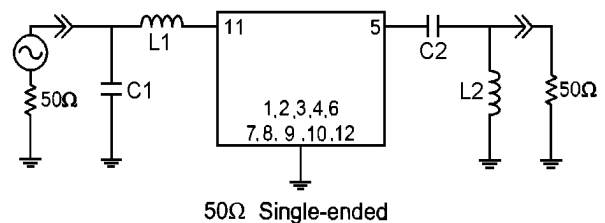

L1=27nH, L2=47nH, C1=14pF, C2=82pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev.0 120706

