



Typical Performance

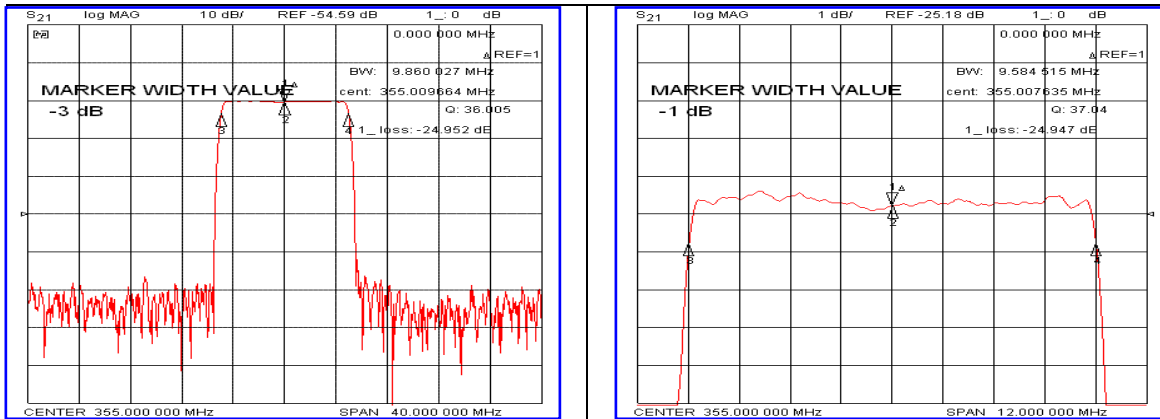


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	354.80	355.00	355.20
Insertion Loss	dB	-	25.00	27.00
1dB Bandwidth	MHz	9.40	9.58	-
5dB Bandwidth	MHz	-	10.03	-
15dB Bandwidth	MHz	-	10.52	-
25dB Bandwidth	MHz	-	10.78	-
40dB Bandwidth	MHz	-	11.00	11.20
Passband Ripple($F_c \pm 4.5\text{MHz}$)	dB	-	0.60	1.40
Absolute Delay	μsec	-	1.63	-
Ultimate Attenuation	dB	40	45	-
Temperature Coefficient	$\text{ppm}/^\circ\text{C}$	-0.032		

Package Dimension

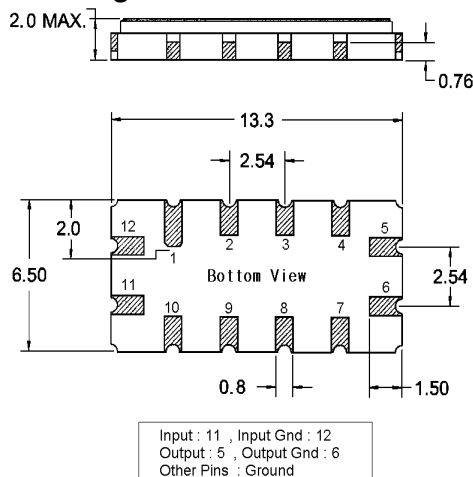

Matching Configuration

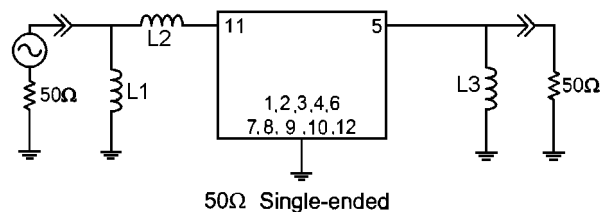

$L1=8.2\text{nH}$, $L2=3.3\text{nH}$, $L3=5.6\text{nH}$
Source / Load Impedance = 50 Ω
Ambient Temperature = 25 $^\circ\text{C}$

Rev.0 120629

