



Typical Performance

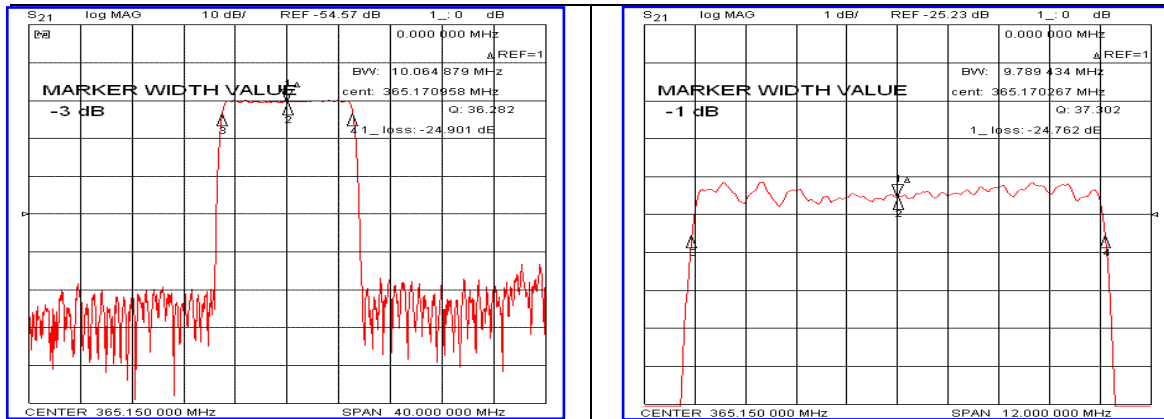


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	364.95	365.15	365.35
Insertion Loss	dB	-	24.90	26.50
1dB Bandwidth	MHz	9.60	9.78	-
5dB Bandwidth	MHz	-	10.26	-
15dB Bandwidth	MHz	-	10.75	-
25dB Bandwidth	MHz	-	11.00	-
40dB Bandwidth	MHz	-	11.25	11.40
Passband Ripple(Fc±4.5MHz)	dB	-	0.70	1.40
Absolute Delay	µsec	-	1.65	-
Ultimate Attenuation	dB	40	45	-
Substrate Material	-	Quartz		

Package Dimension

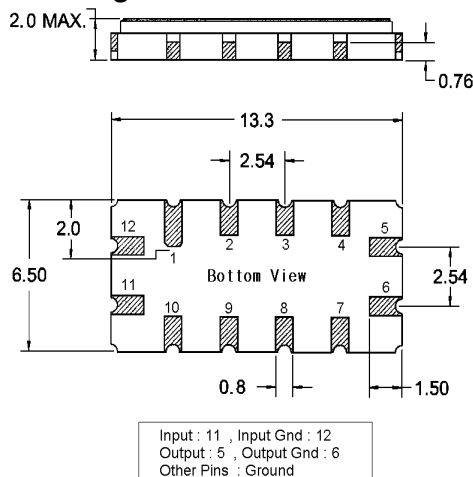

Matching Configuration

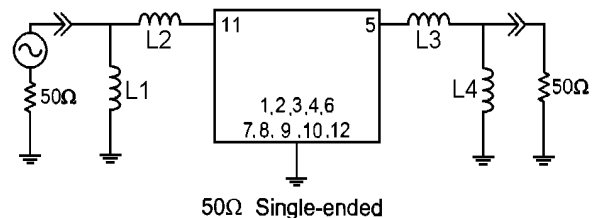

L1=5.6nH, L2=2.2nH, L3=1.8nH, L4=3.9nH
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

Rev.1 120822

