



Typical Performance

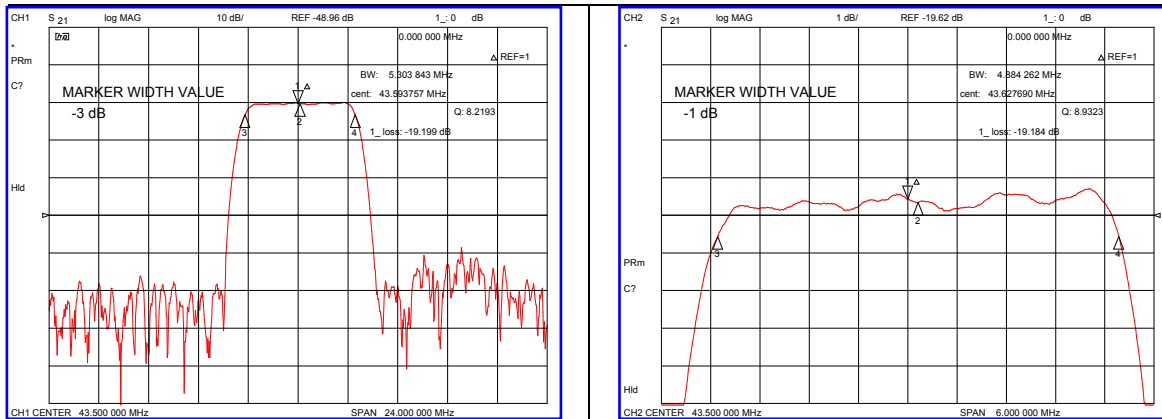


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	43.50	-
Insertion Loss	dB	-	19.50	23.00
1dB Bandwidth	MHz	4.80	4.88	-
3dB Bandwidth	MHz	-	5.30	-
Relative Attenuation				
39.75MHz Point	dB	30	40	-
47.25MHz Point	dB	30	40	-
Passband Ripple	dB	-	0.60	1.00
Ultimate Attenuation	dB	30	37	-
Absolute Delay	µsec	-	1.28	-
Temperature Coefficient	ppm/°C		-72	

Package Dimension

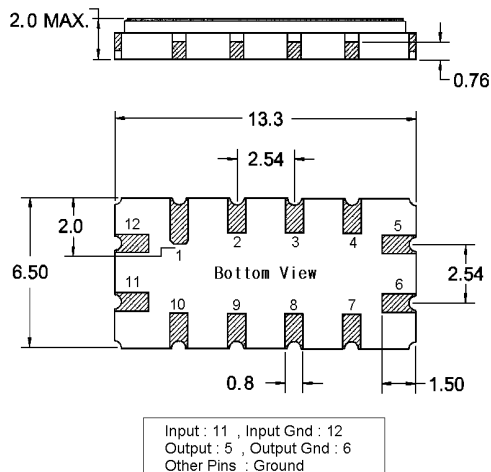

Matching Configuration

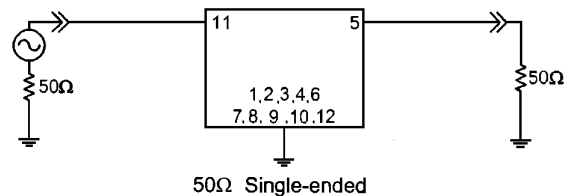

No Matching Required
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

Rev.0 130222

