



### Typical Performance

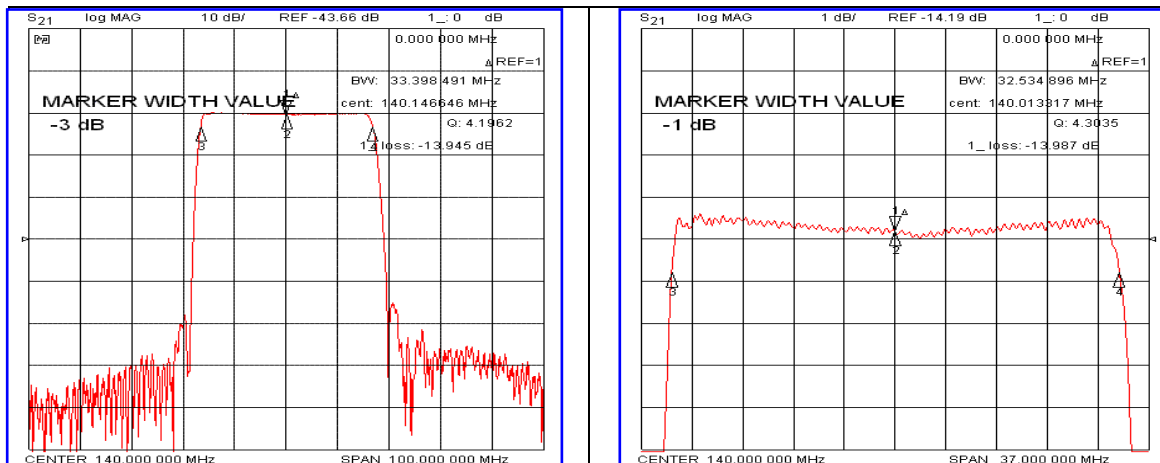


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	140.00	-
Insertion Loss	dB	-	14.00	16.00
1dB Bandwidth	MHz	32.00	32.53	-
3dB Bandwidth	MHz	-	33.39	-
40dB Bandwidth	MHz	-	37.75	38.00
Passband Ripple( $F_c \pm 15\text{MHz}$ )	dB	-	0.55	1.00
Group Delay Variation( $F_c \pm 15\text{MHz}$ )	nsec	-	30	60
Absolute Delay	$\mu\text{sec}$	-	0.94	-
Ultimate Attenuation	dB	40	44	-
Substrate Material	-	Yz-LiNbO <sub>3</sub>		
Temperature Coefficient	ppm/ $^{\circ}\text{C}$	-86		

### Package Dimension

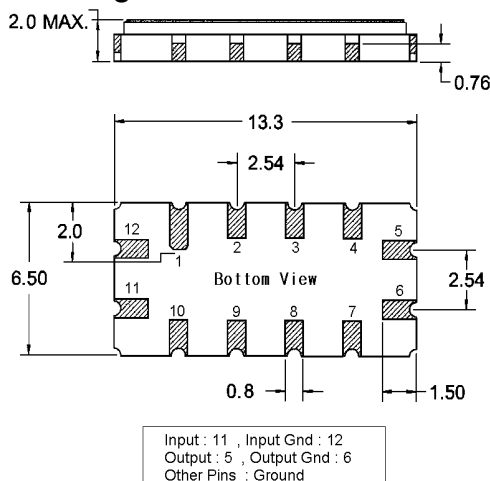

### Matching Configuration

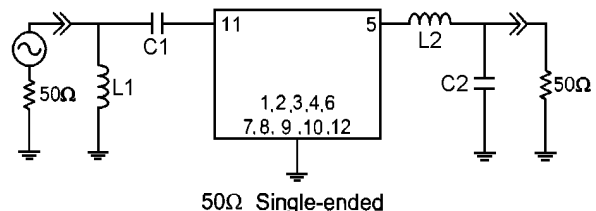

L1=22nH, L2=39nH, C1=100pF, C2=39pF  
Source / Load Impedance = 50 $\Omega$   
Ambient Temperature = 25 $^{\circ}\text{C}$

Rev.0 120731

