



### Typical Performance

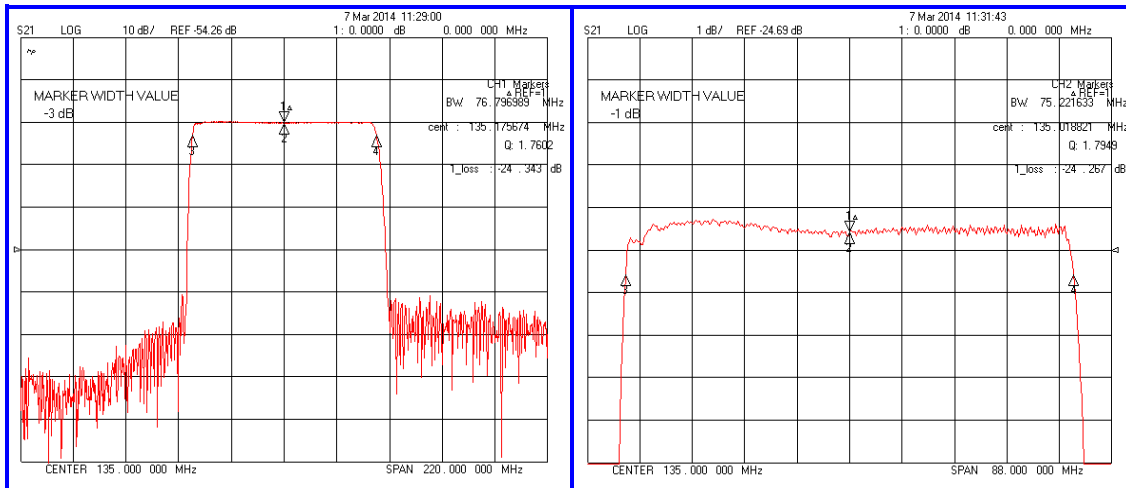


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency(at-1dB)	MHz	134.85	135.00	135.15
Insertion Loss	dB	-	24.35	26.00
1dB Bandwidth	MHz	74.70	75.22	-
3dB Bandwidth	MHz	-	76.79	-
40dB Bandwidth	MHz	-	83.84	84.50
Attenuation	dB	40	45	-
Amplitude Ripple (Fc ± 36MHz)	dB	-	0.60	1.20
Group Delay Variation(Fc ± 36MHz)	nsec	-	20	40
Absolute Delay	µsec	-	0.70	-
Substrate Material & T.C.F	ppm/°C	128-LiNbO <sub>3</sub> & -72		
Package	mm	13 X 6.5 (SMD)		

### Package Dimension

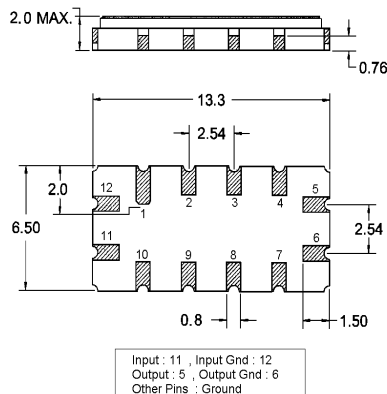

### Matching Configuration

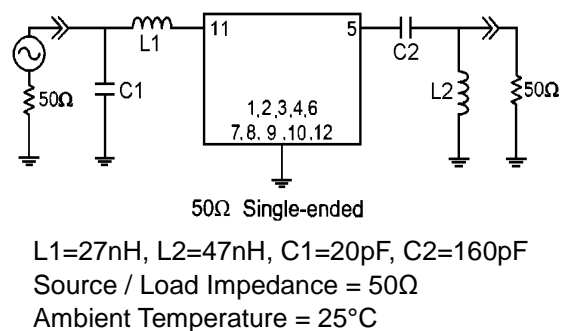

Rev0.140307

