



Typical Performance

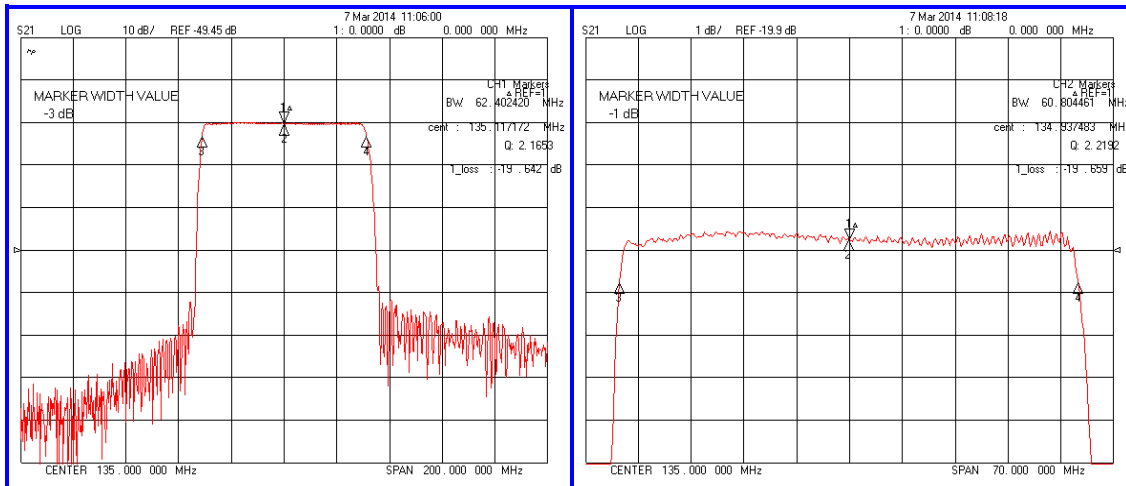


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency(at-1dB)	MHz	134.85	135.00	135.15
Insertion Loss	dB	-	19.65	21.00
1dB Bandwidth	MHz	60.40	60.80	-
3dB Bandwidth	MHz	-	62.40	-
40dB Bandwidth	MHz	-	69.70	70.20
Attenuation	dB	40	45	-
Amplitude Ripple (Fc ± 29MHz)	dB	-	0.50	1.20
Group Delay Variation(Fc ± 29MHz)	nsec	-	20	40
Absolute Delay	µsec	-	0.67	-
Substrate Material & T.C.F	ppm/°C	128-LiNbO ₃ & -72		
Package	mm	13 X 6.5 (SMD)		

Package Dimension

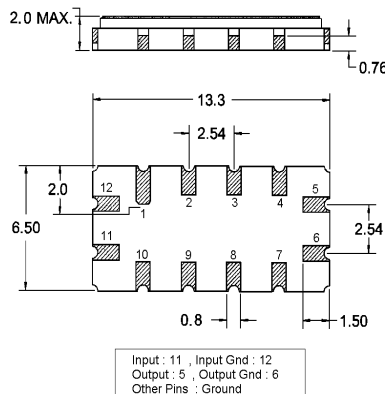

Matching Configuration

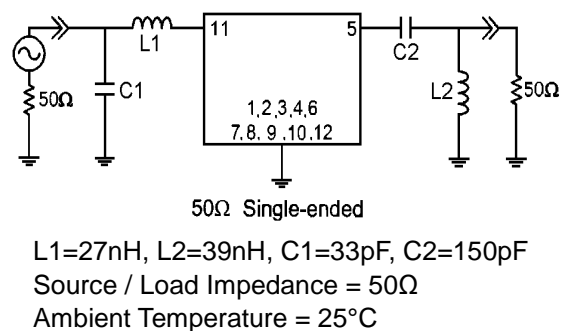

Rev0. 140307

