



Typical Performance

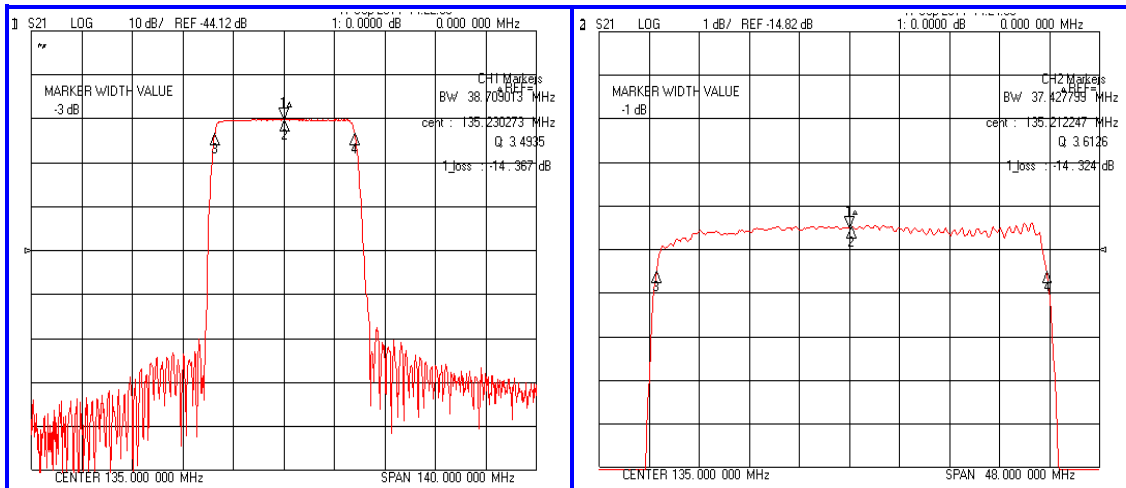


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	135.00	-
Insertion Loss	dB	-	14.50	16.50
1dB Bandwidth	MHz	37.00	37.42	-
3dB Bandwidth	MHz	-	38.70	-
40dB Bandwidth	MHz	-	44.50	45.00
Attenuation	dB	40	45	-
Amplitude Ripple (Fc ± 17.5MHz)	dB	-	0.55	1.00
Group Delay Variation(Fc ± 17.5MHz)	nsec	-	20	40
Absolute Delay	µsec	-	0.67	-
Substrate Material & T.C.F	ppm/°C	YZ-LiNbO ₃ & -86		
Package	mm	13 X 6.5 (SMD)		

Package Dimension

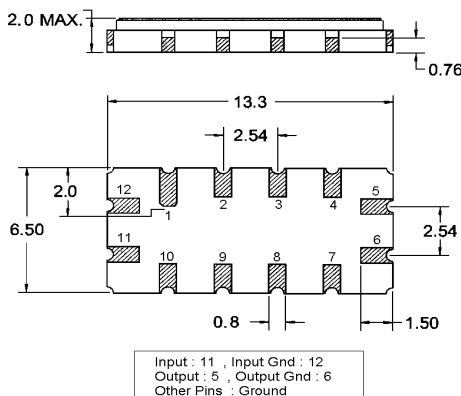

Matching Configuration

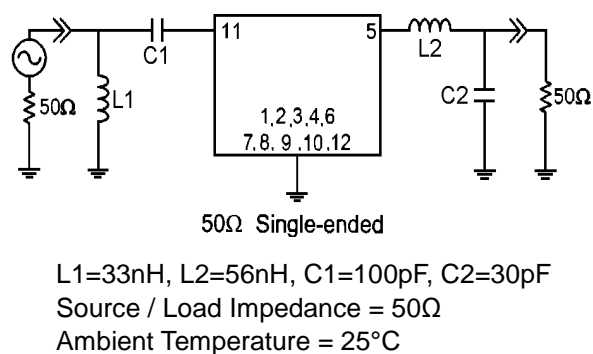

Rev0. 140922

