



Typical Performance

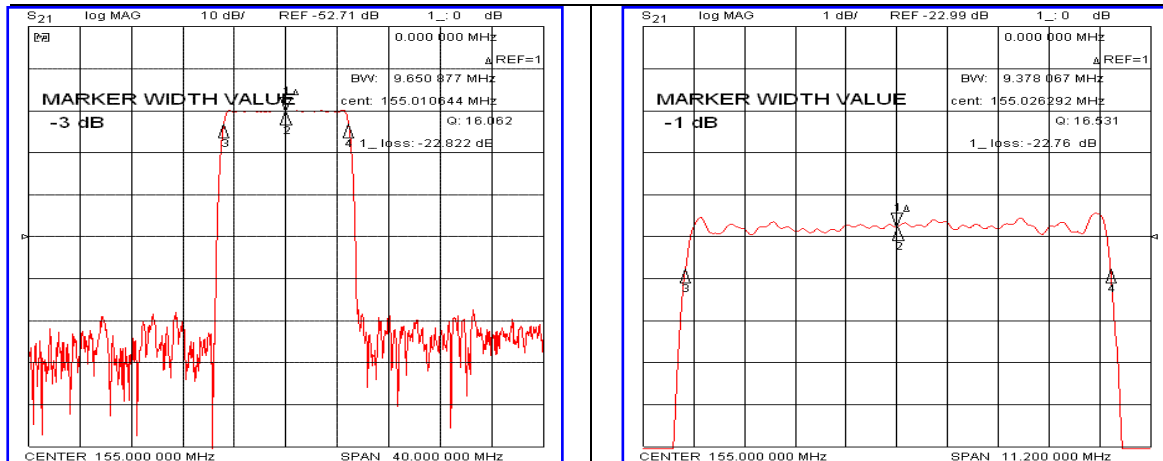


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	155.00	-
Insertion Loss	dB	-	23.00	25.00
1dB Bandwidth	MHz	9.20	9.37	-
3dB Bandwidth	MHz	-	9.65	-
40dB Bandwidth	MHz	-	10.90	11.00
Passband Ripple($F_c \pm 4.5\text{MHz}$)	dB	-	0.55	1.20
Group Delay Variation($F_c \pm 4.5\text{MHz}$)	nsec	-	100	200
Absolute Delay	μsec	-	1.56	-
Ultimate Attenuation	dB	40	46	-
Substrate Material	-	112-LiTaO ₃		
Temperature Coefficient	ppm/ $^{\circ}\text{C}$	-20		

Package Dimension

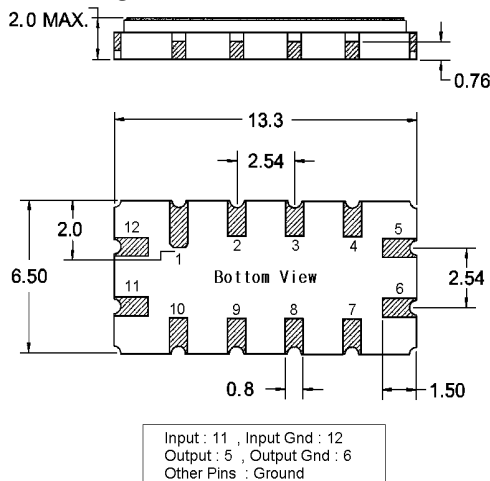

Matching Configuration

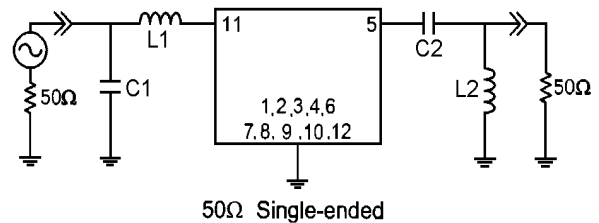

L1=18nH, L2=18nH, C1=56pF, C2=120pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev.0 121016

