



Typical Performance

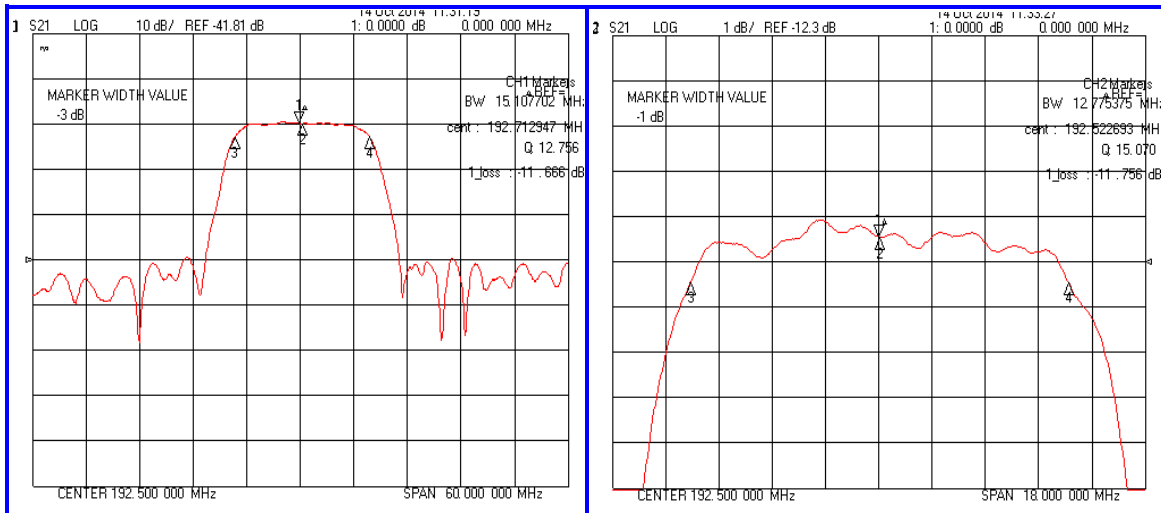


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency(at-1dB)	MHz	-	192.50	-
Insertion Loss	dB	-	11.60	13.00
1dB Bandwidth	MHz	12.30	12.77	-
3dB Bandwidth	MHz	-	15.10	-
15dB Bandwidth	MHz	-	18.70	19.00
30dB Bandwidth	MHz	-	21.70	22.00
Passband Ripple	dB	-	0.80	1.20
Group Delay Variation	nsec	-	50	100
Absolute Delay	µsec	-	0.37	-
Attenuation	dBc	25	30	
Temperature Coefficient	ppm/°C		-86	

Package Dimension

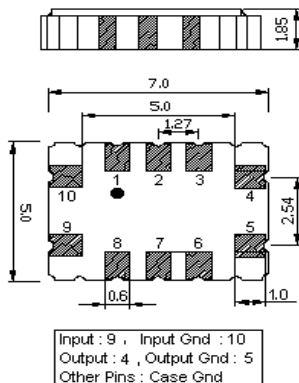

Matching Configuration

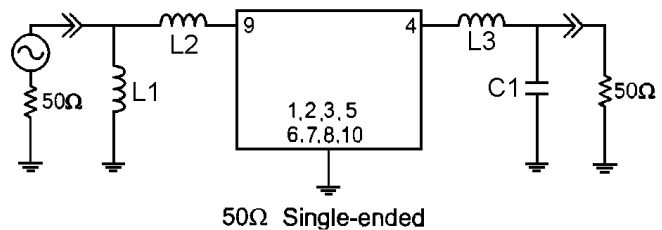

L1=33nH, L2=33nH, L3=27nH, C1=8pF  
Source / Load Impedance = 50Ω  
Ambient Temperature = 25°C

Rev0. 141017

