



### Typical Performance

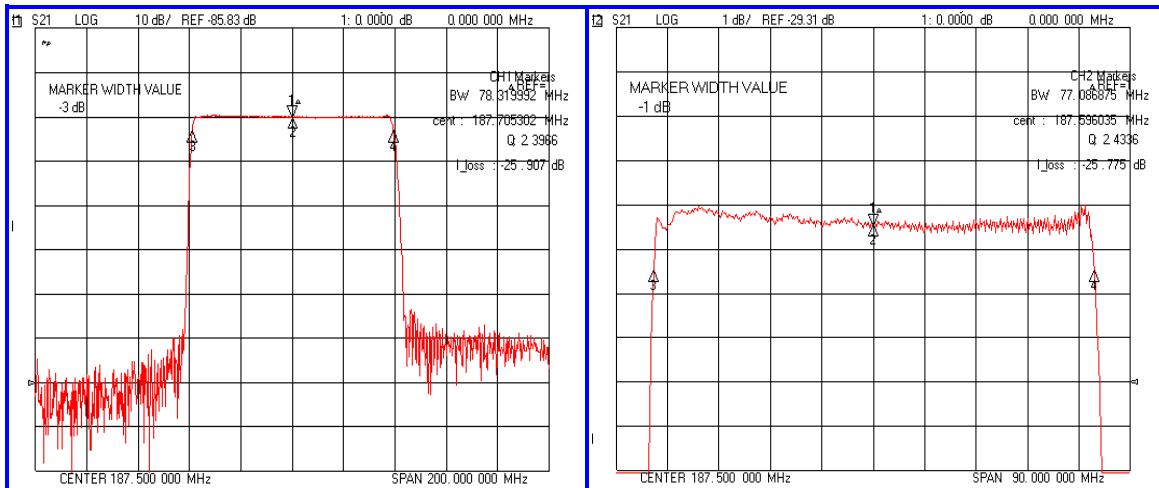


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency(at -1dB)	MHz	-	187.50	-
Insertion Loss	dB	-	25.50	27.00
1dB Bandwidth	MHz	76.70	77.06	-
3dB Bandwidth	MHz	-	78.31	-
40dB Bandwidth	MHz	-	84.50	85.30
Amplitude Ripple(fc ±38MHz)	dB	-	0.75	1.50
Group Delay Variation(fc ±38MHz)	nsec	-	40	80
Absolute Delay	µsec	-	0.85	-
Relative Attenuation		-	-	-
In Band Edge(Fc ±38MHz) ±5.0MHz	dB	30	35	-
@299MHz ~ 451MHz		-	45	-
@700MHz ~ 3GHz		-	25	-
Substrate Material & T.C.F	ppm/°C	128-LiNbO <sub>3</sub> & -72		
Package	mm	13 X 6.5		

### Package Dimension

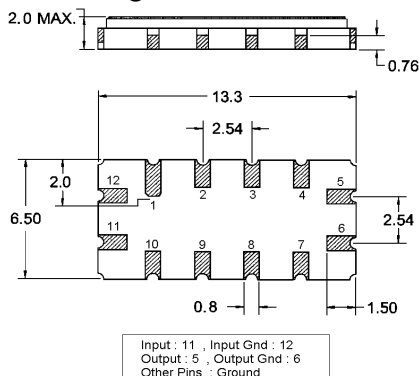

### Matching Configuration

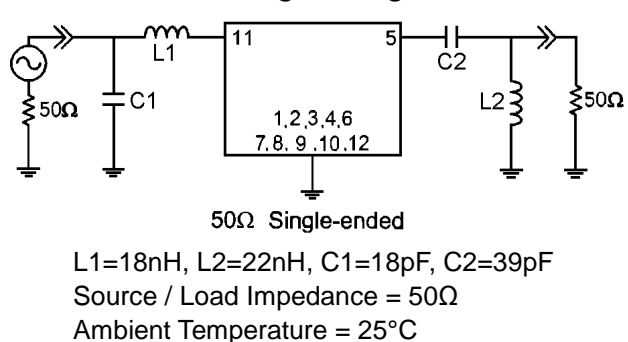

Rev0.150520

