



Typical Performance

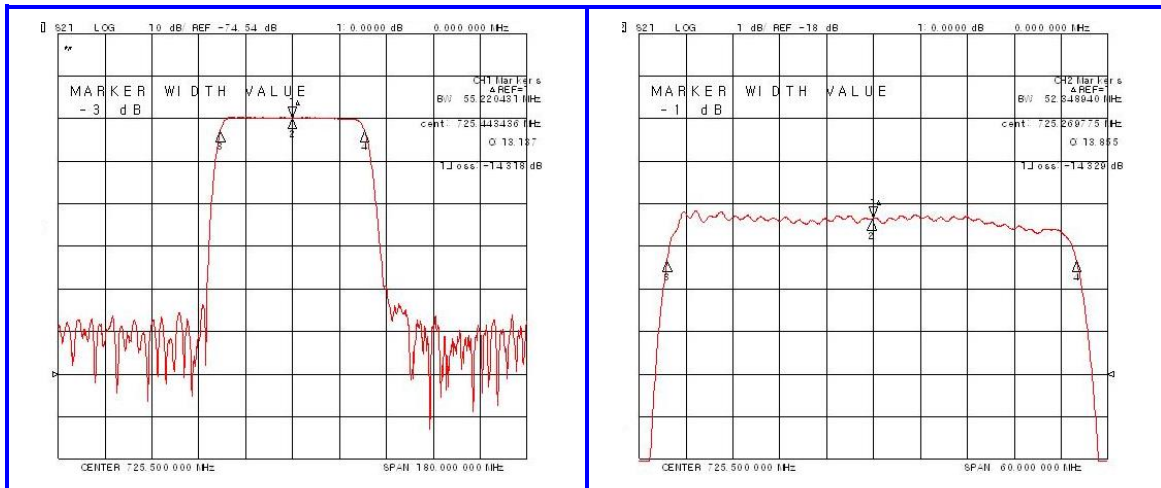


Specification

| Parameter                               | Unit   | Min.                       | Typ.   | Max.  |
|---|--------|----------------------------|--------|-------|
| Center Frequency                        | MHz    | -                          | 725.50 | -     |
| Insertion Loss                          | dB     | -                          | 14.50  | 16.50 |
| 1dB Bandwidth                           | MHz    | 51.30                      | 52.30  | -     |
| 3dB Bandwidth                           | MHz    | -                          | 55.20  | -     |
| 35dB Bandwidth                          | MHz    | -                          | 66.80  | 67.80 |
| Amplitude Ripple (Fc±22.5MHz)           | dB     | -                          | 0.60   | 1.60  |
| Group Delay Variation (Fc±22.5MHz)      | nsec   | -                          | 20     | 60    |
| Absolute Delay                          | µsec   | -                          | 0.30   | -     |
| Relative Attenuation<br>758Mhz ~ 803Mhz | dB     | -                          | 20     | -     |
| Substrate Material & T.C.F              | ppm/°C | YZ-LiNbO <sub>3</sub> &-86 |        |       |

Package Dimension



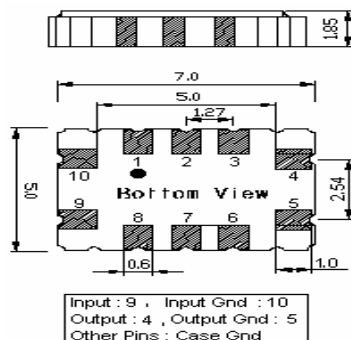


Matching Configuration

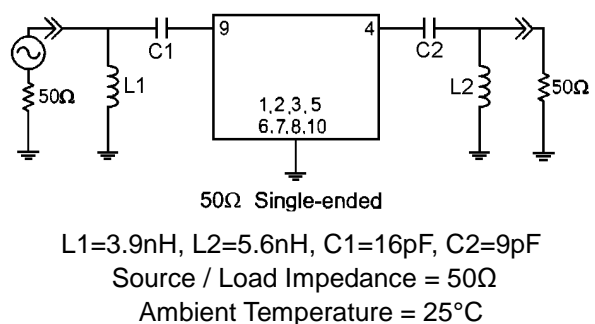

Rev0. 1801018

## Typical Performance

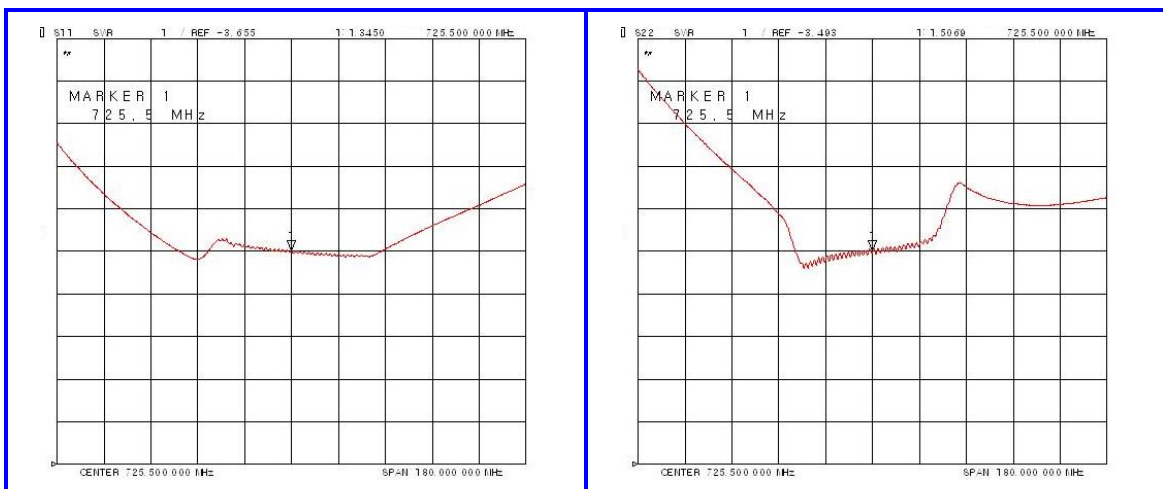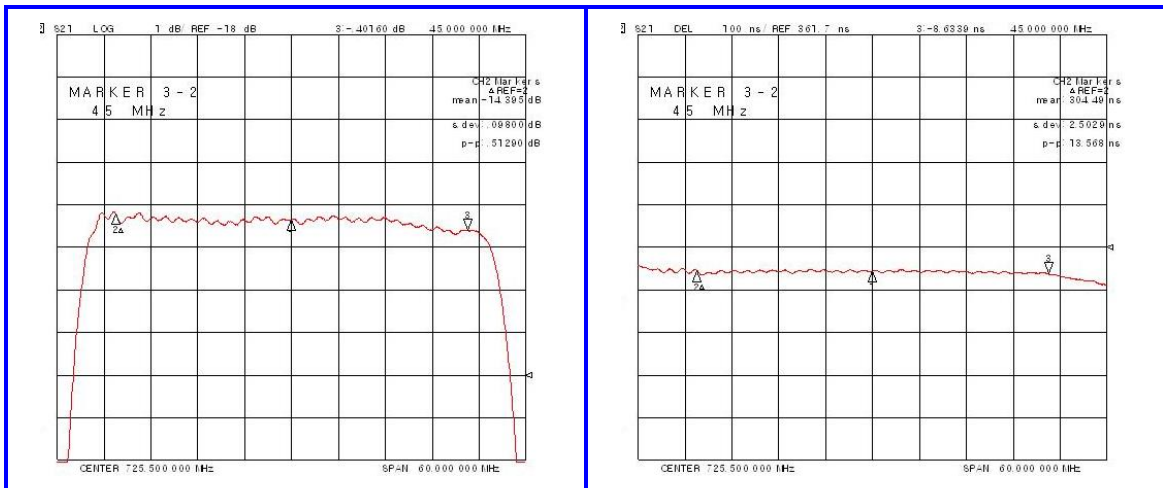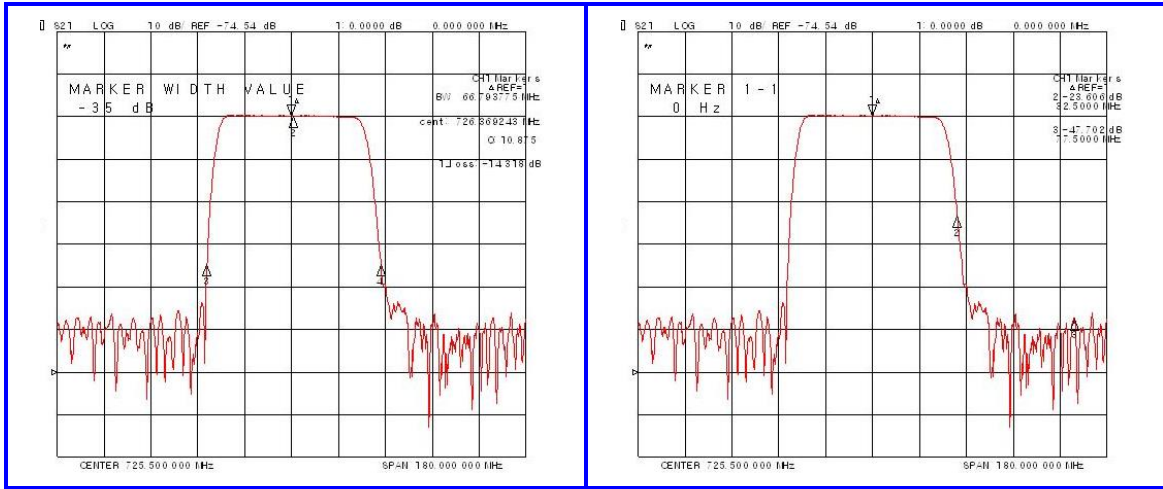

[www.ctech.co.kr](http://www.ctech.co.kr)