



Typical Performance

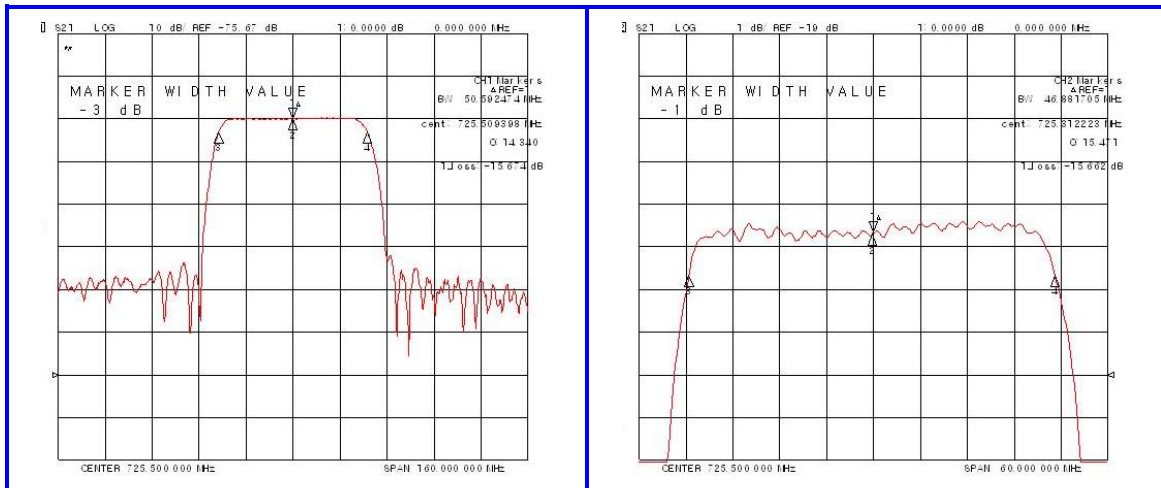


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	725.50	-
Insertion Loss	dB	-	16.00	18.00
1dB Bandwidth	MHz	46.40	46.90	-
3dB Bandwidth	MHz	-	50.60	-
35dB Bandwidth	MHz	-	65.20	66.50
Amplitude Ripple (Fc±22.5MHz)	MHz	-	0.80	1.60
Absolute Delay	µsec	-	0.26	-
Group Delay Variation (Fc±22.5MHz)	nsec	-	30	60
Relative Attenuation				
758MHz	dB	-	25	-
803MHz	dB	-	25	-
Substrate Material & T.C.F	ppm/°C	YZ-LiNbO ₃ &-86		

Package Dimension

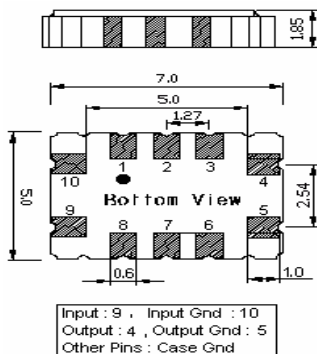

Matching Configuration

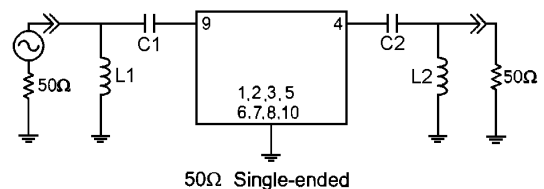

L1=6.8nH, L2=3.9nH, C1=11pF, C2=15pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev.0 180612

