



Typical Performance

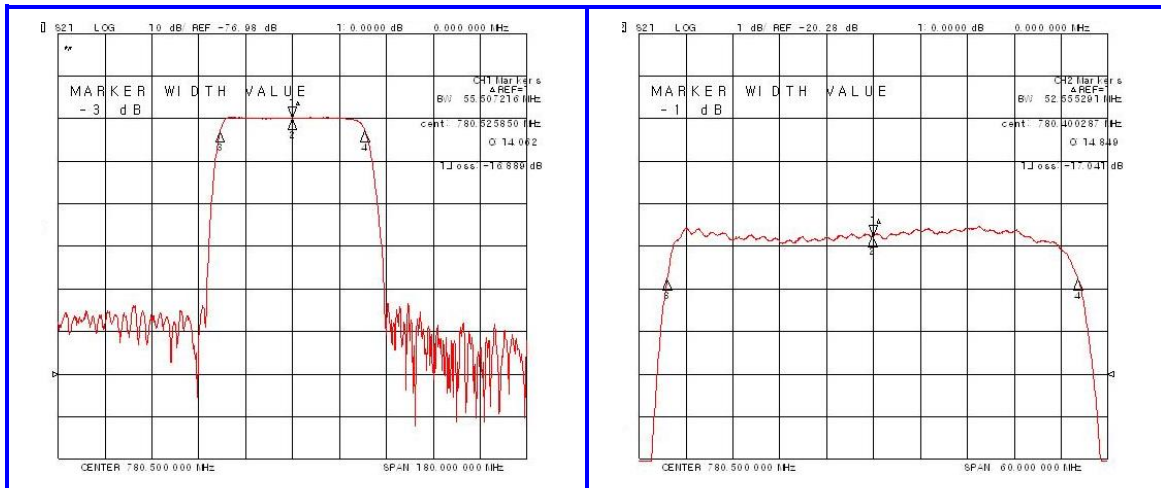


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	780.50	-
Insertion Loss	dB	-	17.00	19.00
1dB Bandwidth	MHz	51.50	52.50	-
3dB Bandwidth	MHz	-	55.50	-
35dB Bandwidth	MHz	-	67.30	68.30
Amplitude Ripple (Fc±22.5MHz)	dB	-	0.50	1.60
Group Delay Variation (Fc±22.5MHz)	nsec	-	20	60
Absolute Delay	µsec	-	0.30	-
Relative Attenuation 703Mhz ~ 748Mhz	dB	-	20	-
Substrate Material & T.C.F	ppm/°C	YZ-LiNbO ₃ &-86		

Package Dimension



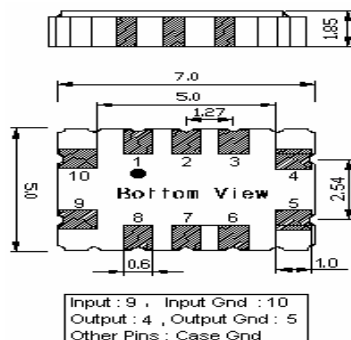


Matching Configuration

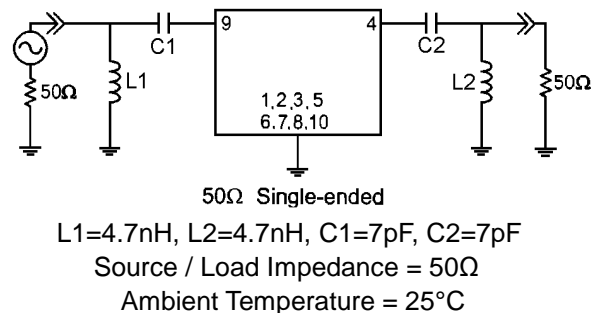

Rev0. 1801018

Typical Performance

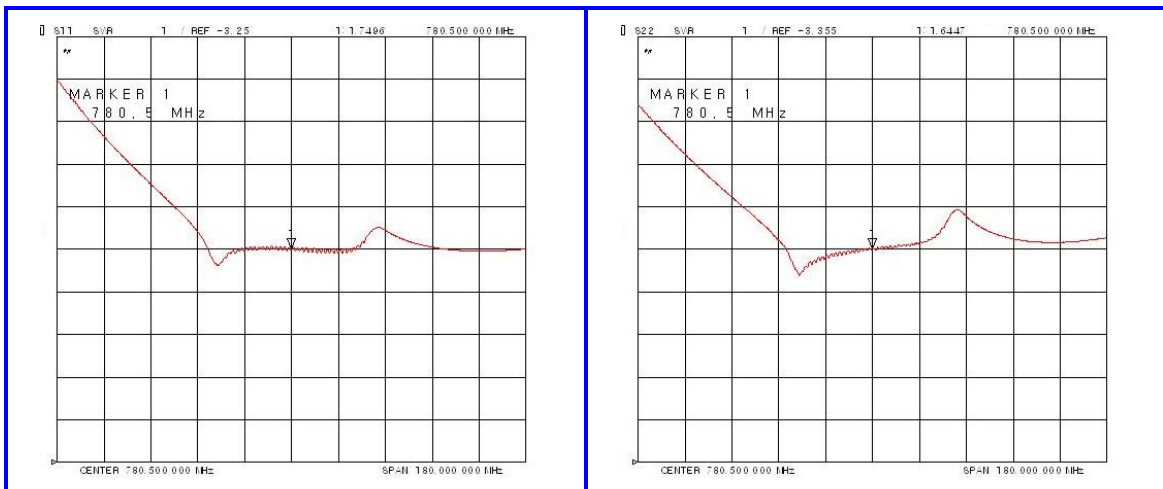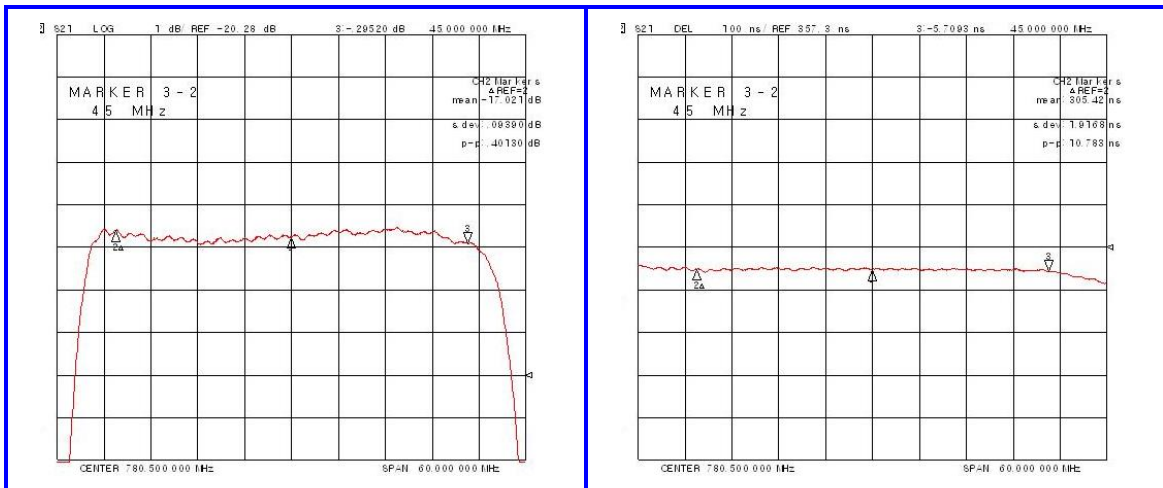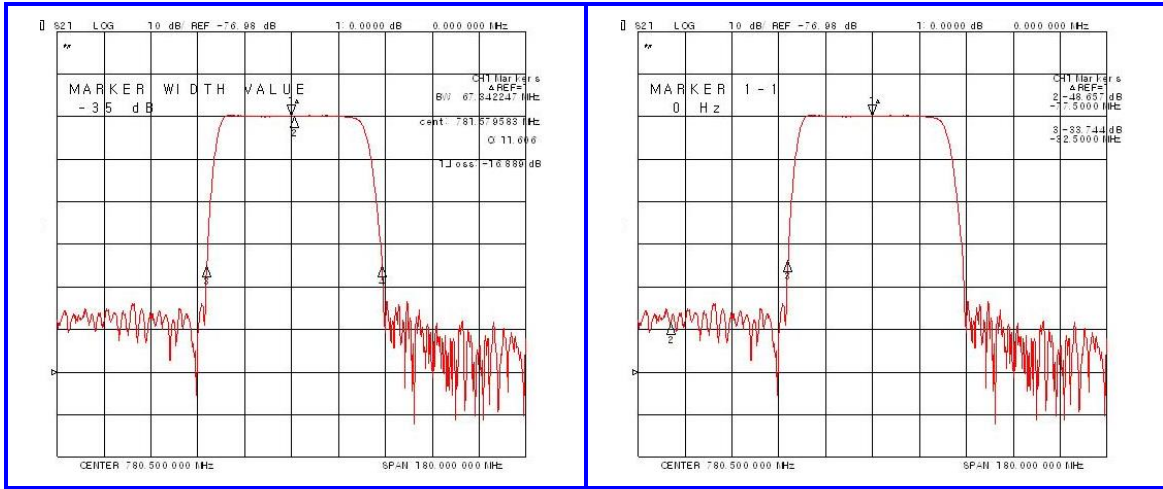

www.ctech.co.kr