



Typical Performance

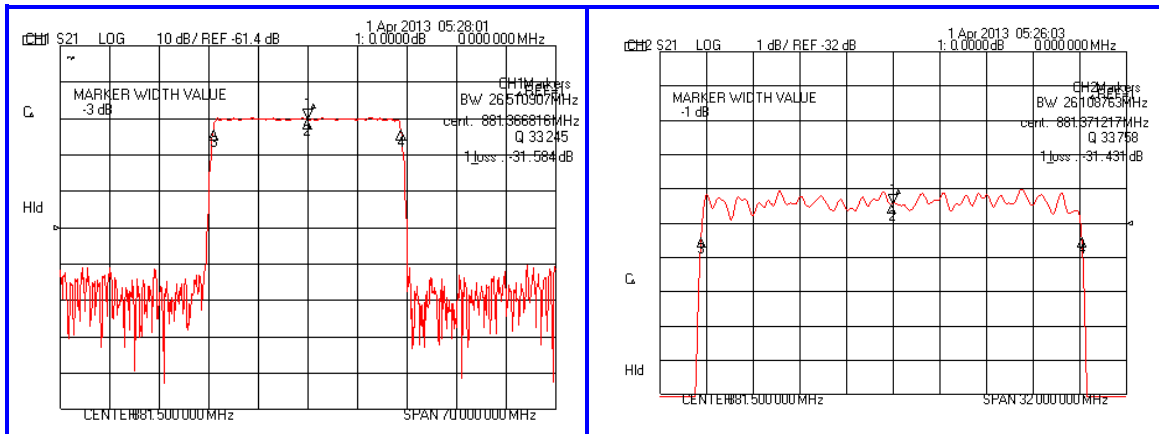


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	881.50	-
Insertion Loss	dB	-	31.58	34.50
1dB Bandwidth	MHz	-	26.10	-
35dB Bandwidth	MHz	-	28.27	-
Out of Band Gain Fc±12.5MHz±2MHz Point	MHz	35	40	-
Amplitude Ripple (Fc±12.5MHz)	dB	-	1.20	2.00
Group Delay Variation(Fc±12.5MHz)	-	-	80	2.00
Absolute Delay	µsec	-	1.20	-
Substrate Material	-	Quartz		
Package	mm	13.3 X 6.5 (SMD)		

Package Dimension

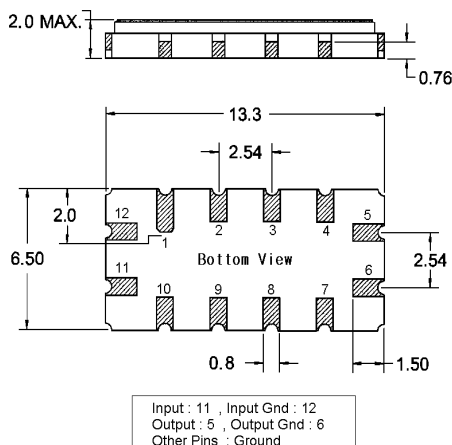

Matching Configuration

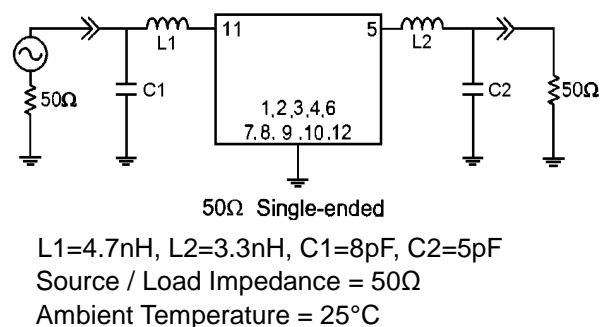

Rev.1 180531

