



Typical Performance

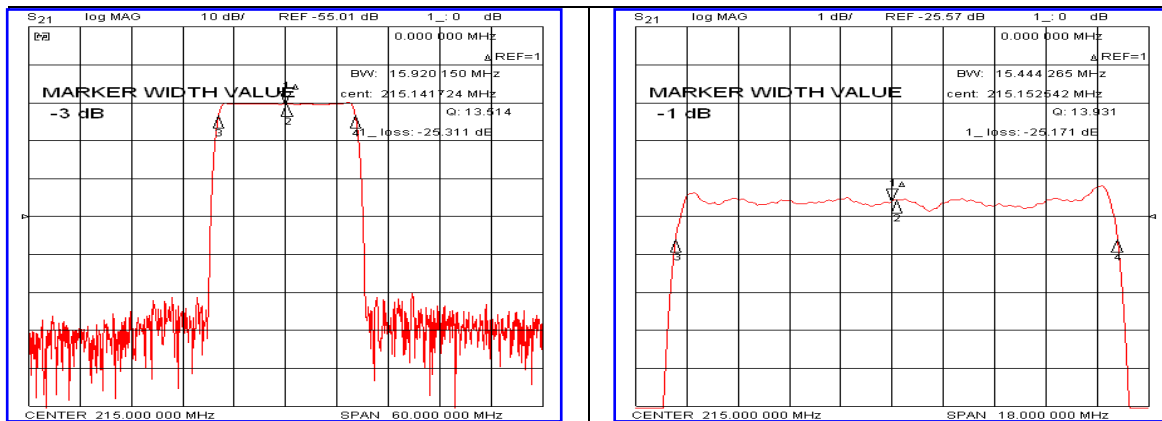


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	215.00	-
Insertion Loss	dB	-	25.50	27.50
1dB Bandwidth	MHz	15.20	15.44	-
3dB Bandwidth	MHz	-	15.92	-
15dB Bandwidth	MHz	-	17.15	-
25dB Bandwidth	MHz	-	17.63	-
40dB Bandwidth	MHz	-	18.10	18.25
Passband Ripple(Fc±7.25MHz)	dB	-	0.65	1.20
Absolute Delay	µsec	-	1.51	-
Ultimate Attenuation	dB	40	47	-
Temperature Coefficient	ppm/°C	-20		

Package Dimension

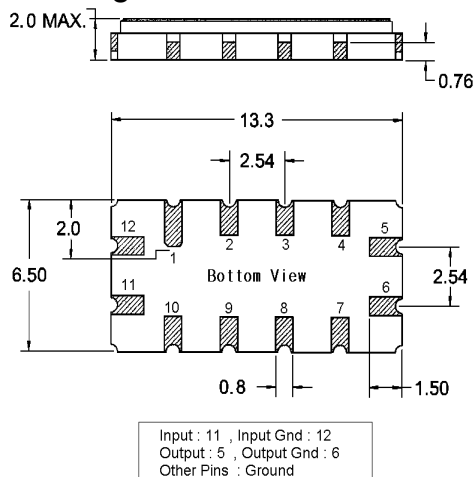

Matching Configuration

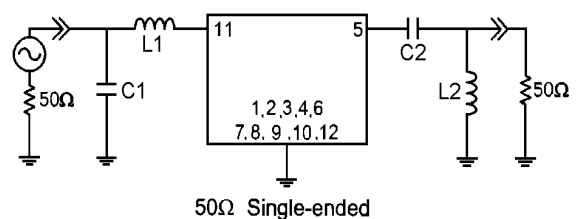

L1=33nH, L2=18nH, C1=20pF, C2=300pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev.0 120824

