



Typical Performance

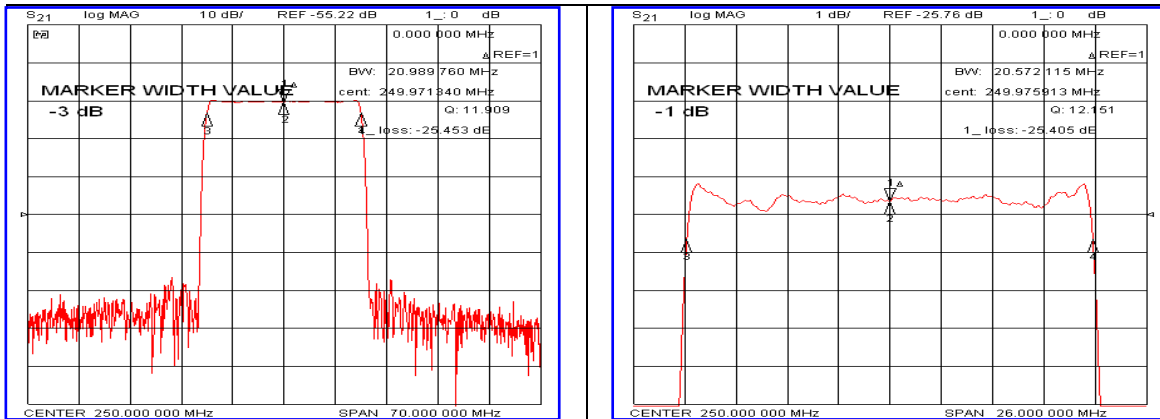


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	250.00	-
Insertion Loss	dB	-	25.50	27.50
1dB Bandwidth	MHz	20.30	20.57	-
3dB Bandwidth	MHz	-	20.98	-
15dB Bandwidth	MHz	-	22.07	-
25dB Bandwidth	MHz	-	22.55	-
40dB Bandwidth	MHz	-	22.95	23.10
Passband Ripple(Fc±9.75MHz)	dB	-	0.75	1.20
Absolute Delay	µsec	-	1.51	-
Ultimate Attenuation	dB	40	45	-
Temperature Coefficient	ppm/°C	-20		

Package Dimension

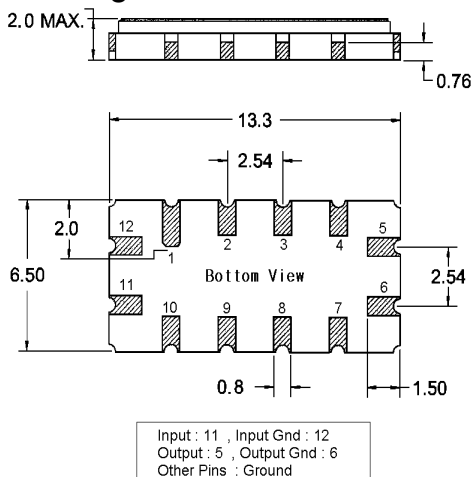

Matching Configuration

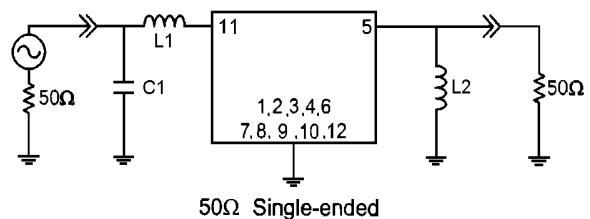

L1=22nH, L2=12nH, C1=30pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev.0 120824

