


Specification



Parameter	Unit	Low (RX)	High (TX)
Center Frequency (Fo)	MHZ	1732.5	2132.5
Bandwidth	Mhz	Fc ± 22.5 (1710~1755Mhz)	Fc ± 22.5 (2110~2155Mhz)
Insertion Loss in BW	dB	2.5 (Max)	2.5 (Max)
Passband Ripple in BW	dB	1.0 (Max)	1.0 (Max)
Return Loss in BW	dB	15.0 (Min)	15.0 (Min)
Attenuation	dB	40.0 (Min) @ 1805~1990Mhz 50.0 (Min) @ 2110~2155Mhz	35.0 (Min) @ 1805~1990Mhz 50.0 (Min) @ 1710~1785Mhz
Input Power		3W (Max)	
In/Out Impedance	Ω	50	
Operating Temperature	℃	-40 ~ 85	

Package Dimension

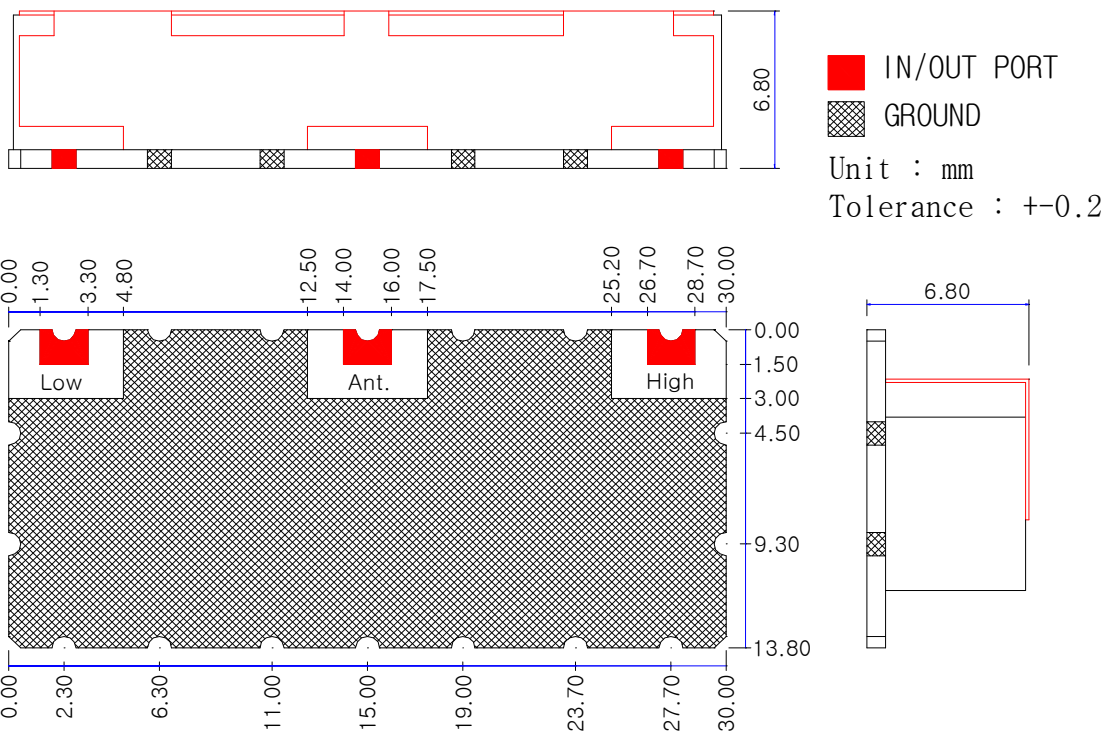

2009.09. 16

www.ctech.co.kr