


Specification





Parameter	Unit	Low	High
Center Frequency (Fo)	MHz	1950	2140
Bandwidth	Mhz	1920~1980	2110~2170
Insertion Loss in BW	dB	1.8(Max)	1.8(Max)
Passband Ripple in BW	dB	0.8(Max)	0.8(Max)
Return Loss in BW	dB	15.0(Min)	15.0(Min)
Attenuation	dB	50.0(Min) @ 2110~2170Mhz	50.0(Min) @ 1920~1980Mhz
Input Power		3W (Max)	
In/Out Impedance	Ω	50	
Operating Temperature	℃	-30 ~ 85	


Package Dimension

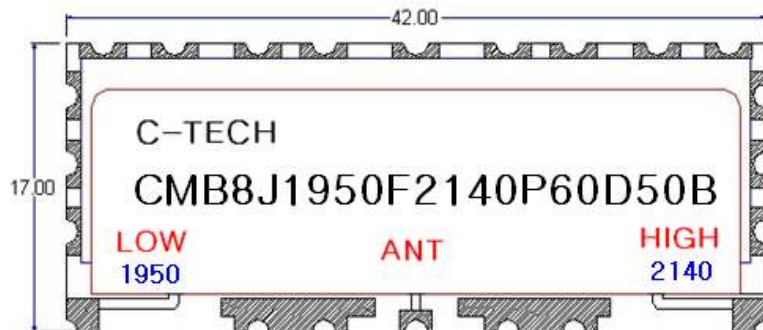

  
Soldering

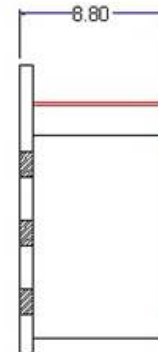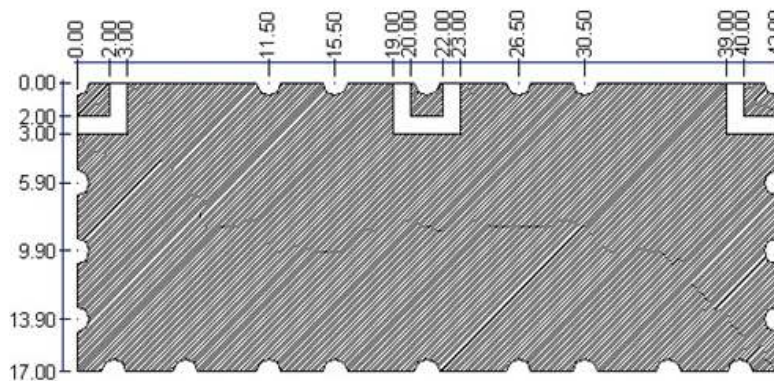

# Performance Graph

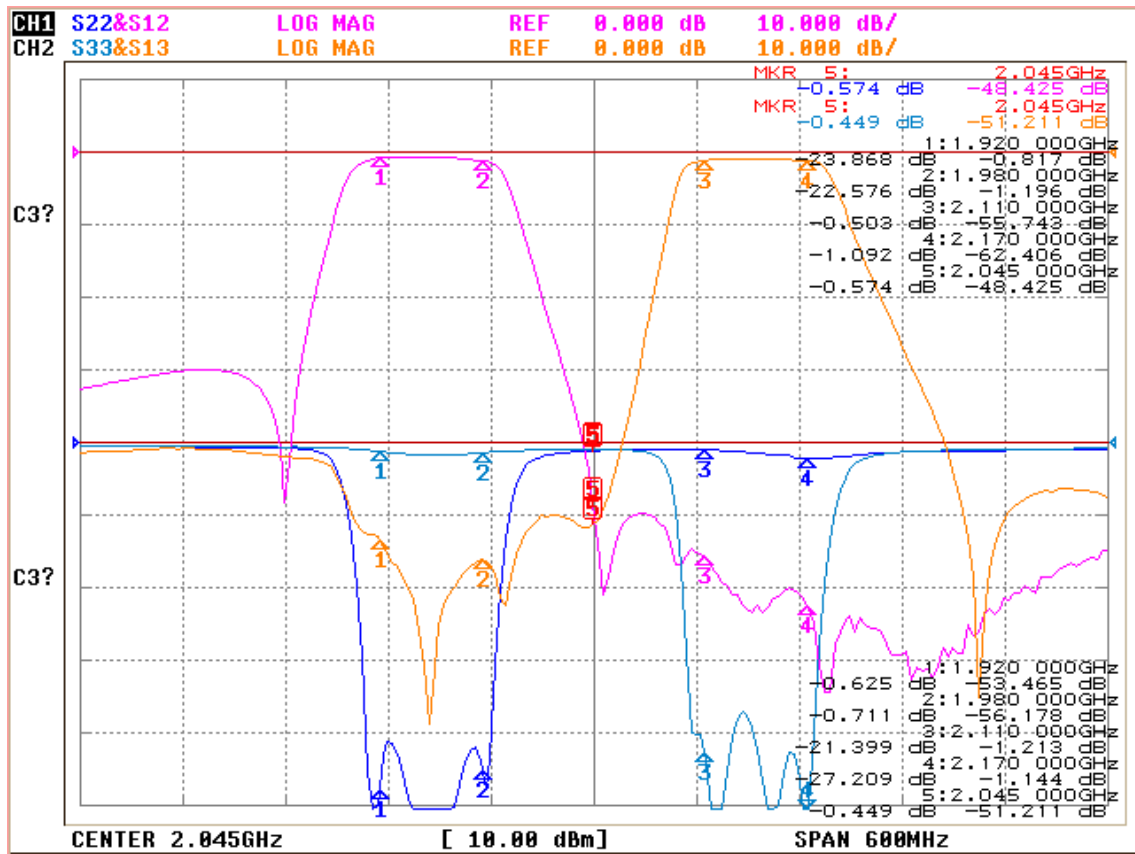

2009.07.30

[www.ctech.co.kr](http://www.ctech.co.kr)