


Specification





Parameter	Unit	Low	High
Center Frequency (Fo)	MHz	897.5	942.5
Bandwidth	Mhz	Fc ± 17.5 (880~915Mhz)	Fc ± 17.5 (925~960Mhz)
Insertion Loss in BW	dB	3.5(Max)	3.5(Max)
Passband Ripple in BW	dB	2.8(Max)	2.8(Max)
Return Loss in BW	dB	15.0(Min)	15.0(Min)
Attenuation	dB	12.0(Min) @ DC~840Mhz 50.0(Min) @ 925~960Mhz	12.0 (Min) @ 995Mhz 50.0(Min) @ 880~915Mhz
Input Power		3W (Max)	
In/Out Impedance	Ω	50	
Operating Temperature	℃	-30 ~ 85	

Package Dimension

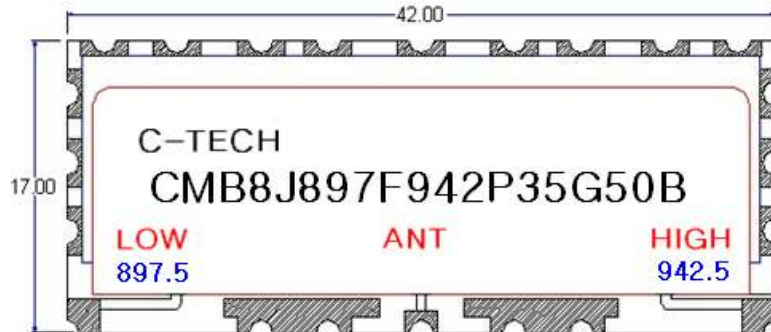


Soldering

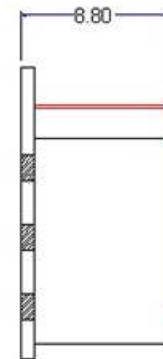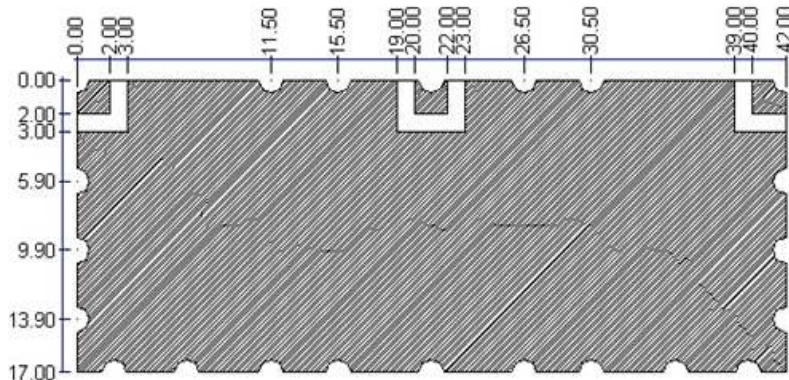

2009.07.30

www.ctech.co.kr