


Specification





Parameter	Unit	Low	High
Center Frequency (Fo)	MHz	902.5	947.5
Bandwidth	Mhz	Fc ± 12.5 (890~915Mhz)	Fc ± 12.5 (930~960Mhz)
Insertion Loss in BW	dB	2.7 (Max) @ 890~913Mhz 3.2(Max) @ 915Mhz	2.7 (Max) @ 937~960Mhz 3.2(Max) @ 935Mhz
Passband Ripple in BW	dB	2.3 (Max)	2.3 (Max)
Return Loss in BW	dB	14.0 (Min)	14.0 (Min)
Attenuation	dB	40.0 (Min) @ 925Mhz 55.0(Min) @ 937~960Mhz	40.0 (Min) @ 925Mhz 55.0(Min) @ 890~913Mhz
Input Power		3W (Max)	
In/Out Impedance	Ω	50	
Operating Temperature	℃	-30 ~ 85	

Package Dimension

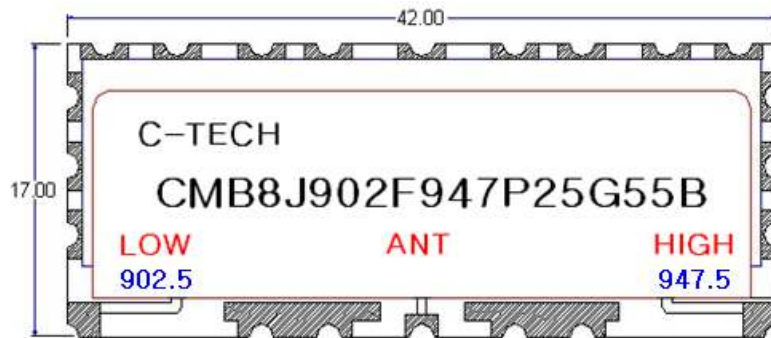

 Soldering

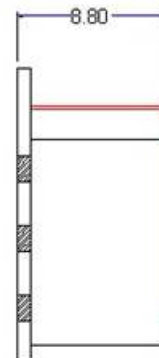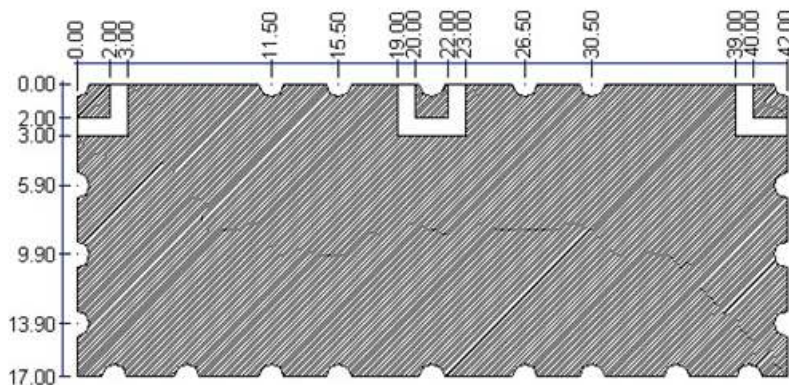

2009.07.30

www.ctech.co.kr