


Specification





Parameter	Unit	LOW	HIGH
Center Frequency	Mhz	1940	2130
Frequency Range	Mhz	1935~1945	2125~2135
Bandwidth	dB	10	10
Insertion Loss	dB	1.5 (Max)	1.5 (Max)
Ripple	dB	0.5 (Max)	0.5 (Max)
Attenuation	dB	80.0(Min) @ 2125~2135Mhz	80.0(Min) @ 1935~1945Mhz
Return Loss	dB	15.0 (Min)	15.0 (Min)
Impedance	Ω	50	
Input Power	Watt	30.0 (Max)	
Operating Temp	$^{\circ}\text{C}$	-40 ~ +85	

Dimension(mm)

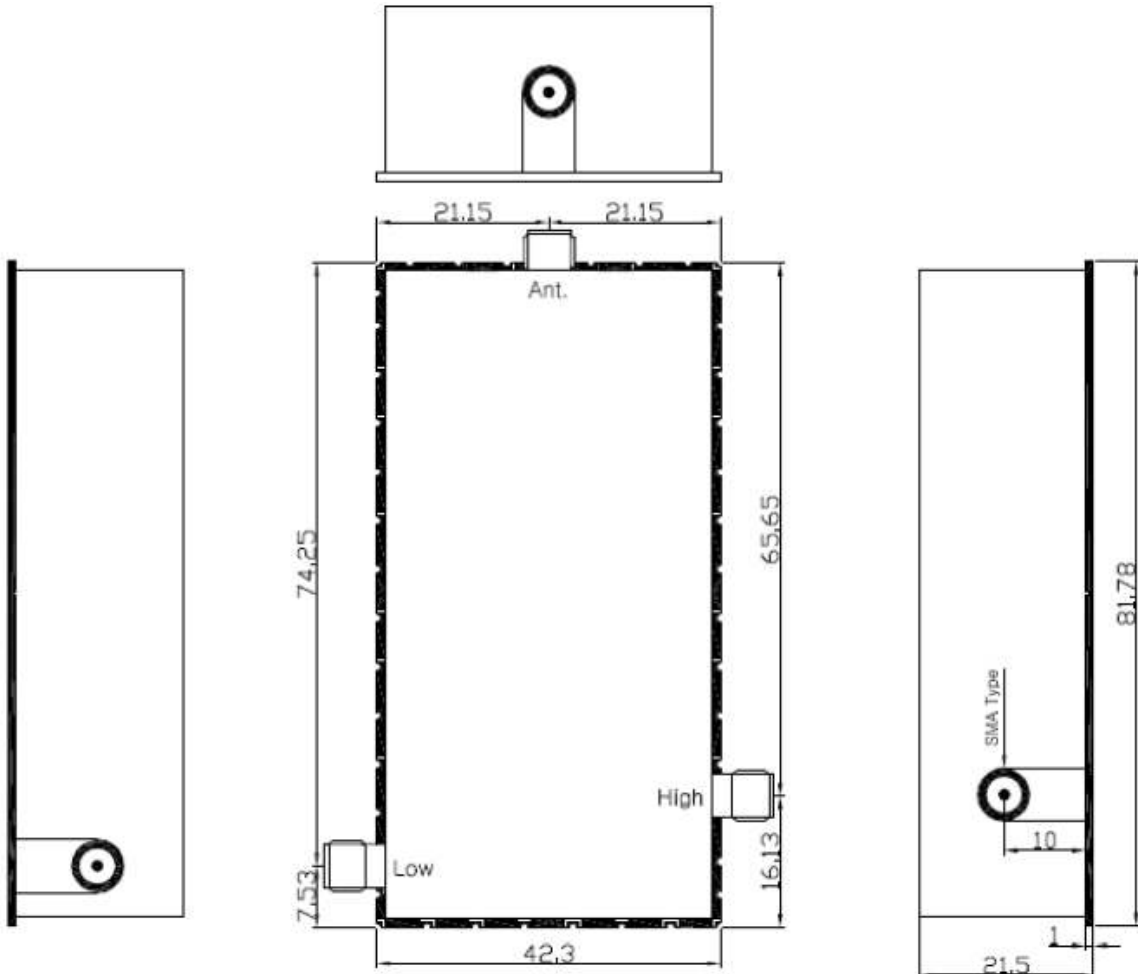

Performance Graph

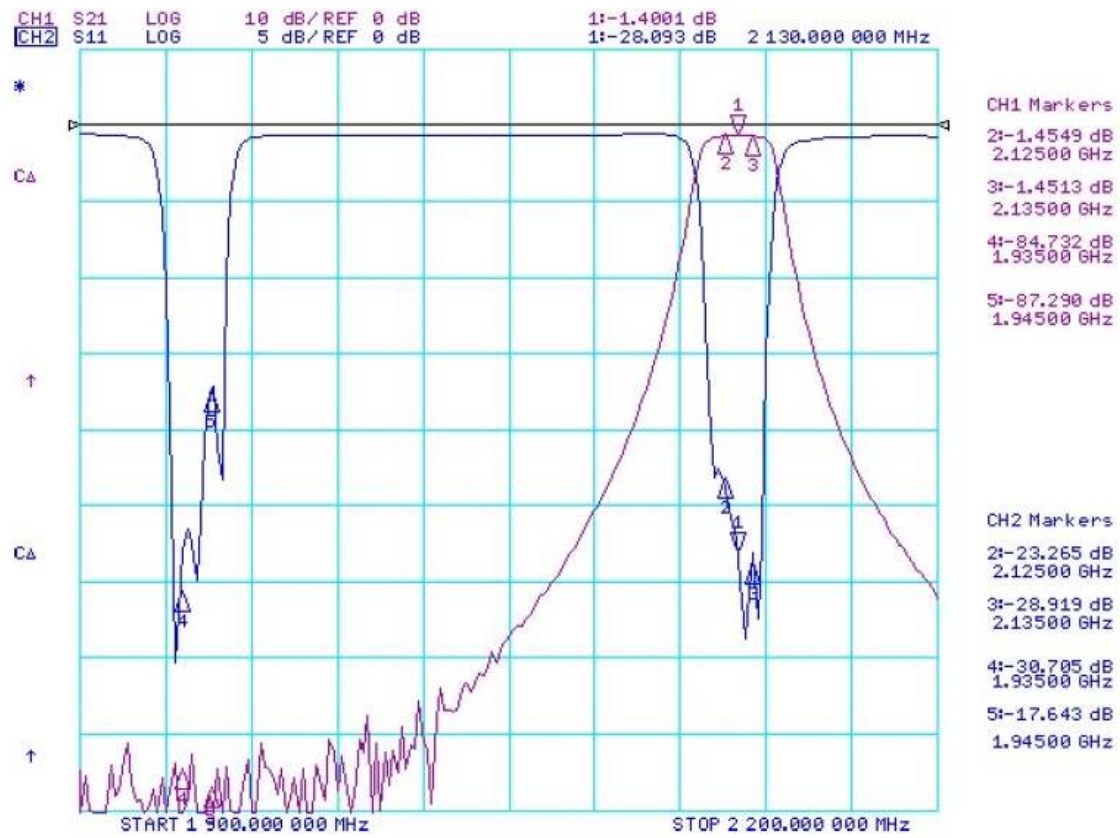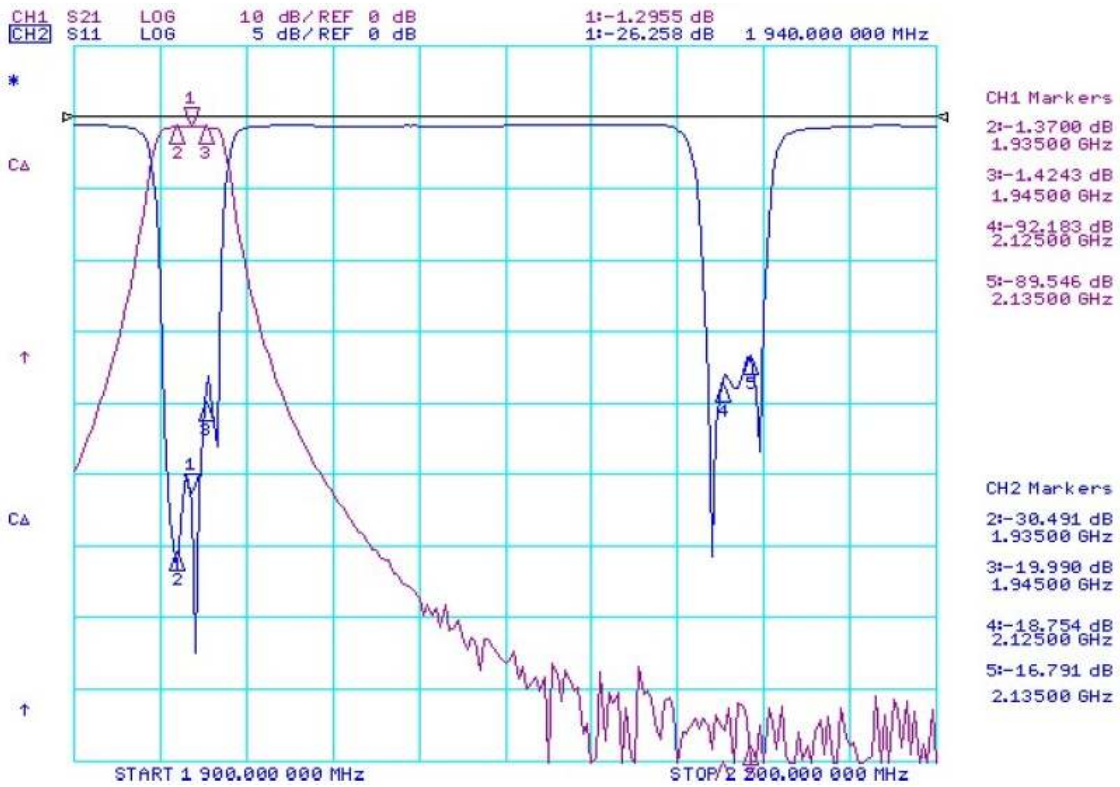

2010.04.19

www.ctech.co.kr