



### Typical Performance

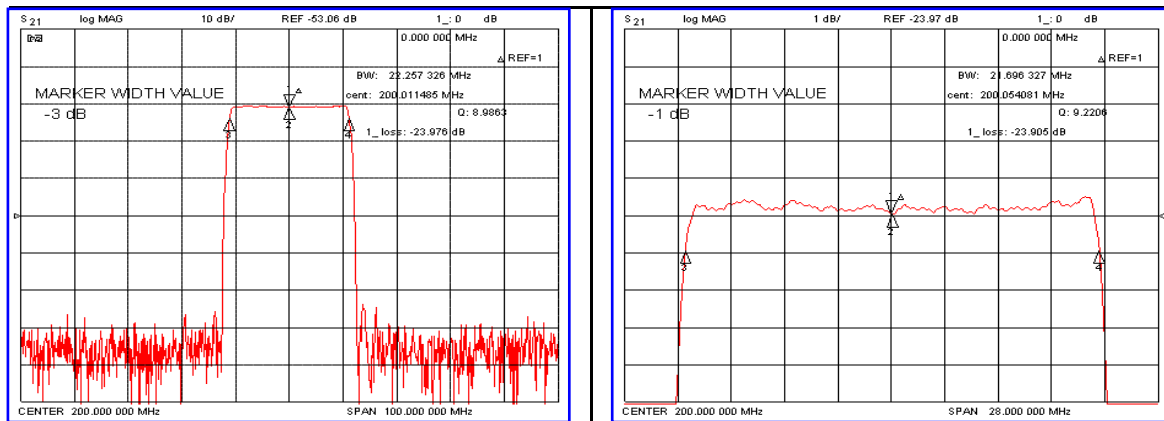

### Specification


Parameter	Unit	Min.	Typ.	Max.
Center Frequency (Fc)	MHz	199.80	200.00	200.20
Insertion Loss	dB	-	24.00	25.00
1dB Bandwidth	MHz	-	21.69	-
3dB Bandwidth	MHz	22.00	22.25	-
40dB Bandwidth	MHz	-	24.75	24.90
Passband Ripple	dB	-	0.55	1.00
Group Delay Variation	nsec	-	40	80
Absolute Delay	μsec	-	1.18	-
Ultimate Attenuation	dB	40	50	
Substrate Material	-	128-LiNbO <sub>3</sub>		

### Package Dimension

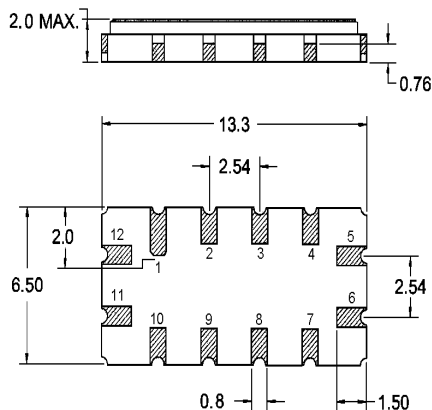

Input : 11 , Input Gnd : 12  
 Output : 5 , Output Gnd : 6  
 Other Pins : Ground

### Matching Configuration

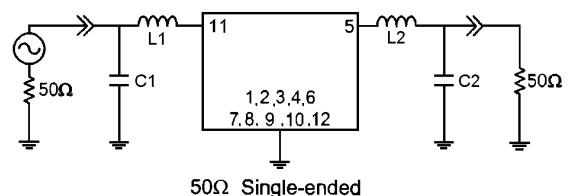

L1=10nH, L2=10nH, C1=C2=8.2pF  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C

Rev0. 070402

