



Typical Performance

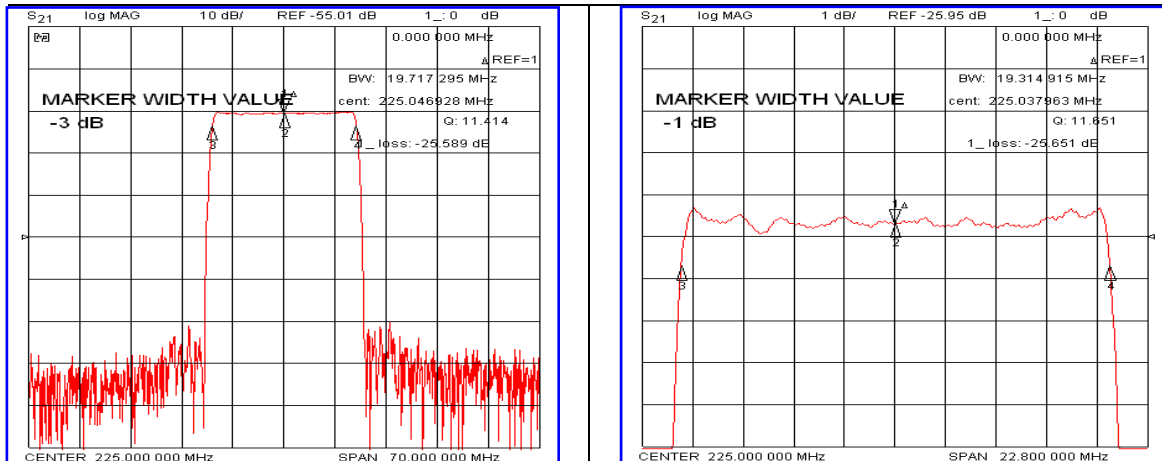


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	225.00	-
Insertion Loss	dB	-	25.80	27.50
1dB Bandwidth	MHz	19.10	19.31	-
3dB Bandwidth	MHz	-	19.71	-
40dB Bandwidth	MHz	-	21.60	21.80
Passband Ripple($F_c \pm 9.0\text{MHz}$)	dB	-	0.60	1.20
Group Delay Variation($F_c \pm 9.0\text{MHz}$)	nsec	-	50	100
Absolute Delay	μsec	-	1.92	-
Ultimate Attenuation	dB	40	48	-
Substrate Material	-	112-LiTaO ₃		
Temperature Coefficient	ppm/ $^{\circ}\text{C}$	-20		

Package Dimension

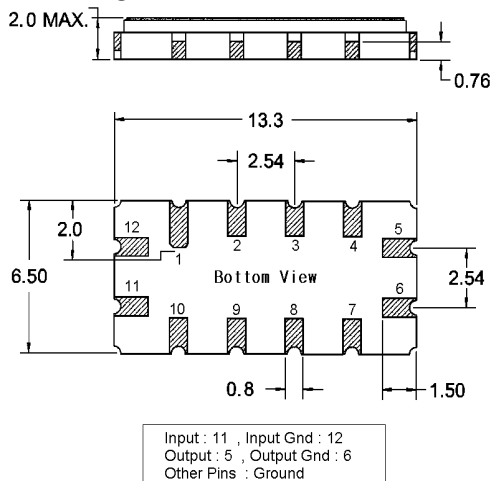

Matching Configuration

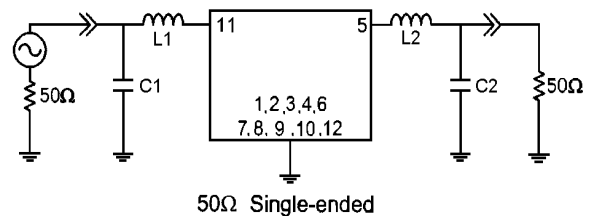

L1=27nH, L2=27nH, C1=33pF, C2=30pF
Source / Load Impedance = 50Ω
Ambient Temperature = 25°C

Rev.0 121130

