



Typical Performance

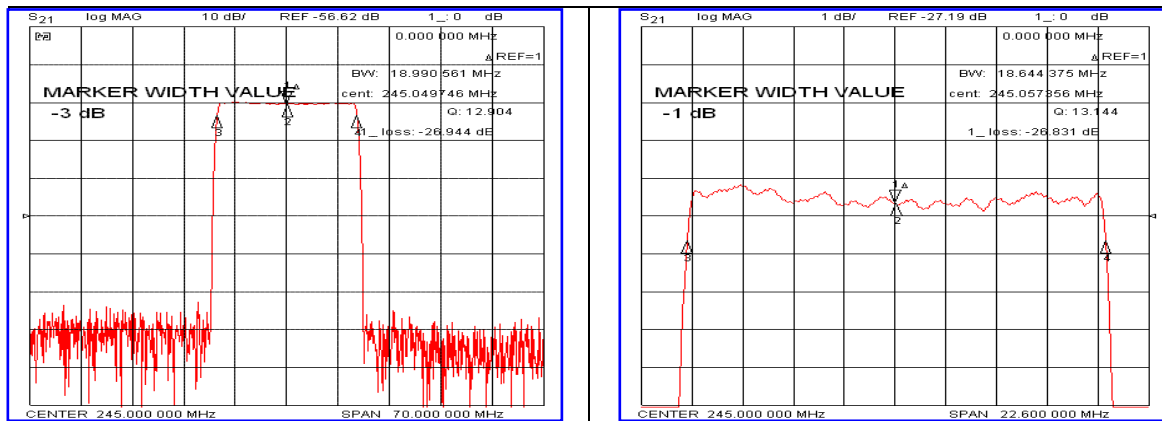


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	245.00	-
Insertion Loss	dB	-	26.90	29.00
1dB Bandwidth	MHz	18.50	18.64	-
3dB Bandwidth	MHz	-	18.99	-
40dB Bandwidth	MHz	-	20.52	20.70
Passband Ripple(Fc ± 9MHz)	dB	-	0.65	1.20
Group Delay Variation(Fc ± 9MHz)	nsec	-	50	100
Absolute Delay	µsec	-	2.25	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	112-LiTaO ₃		
Temperature Coefficient	ppm/°C	-20		

Package Dimension

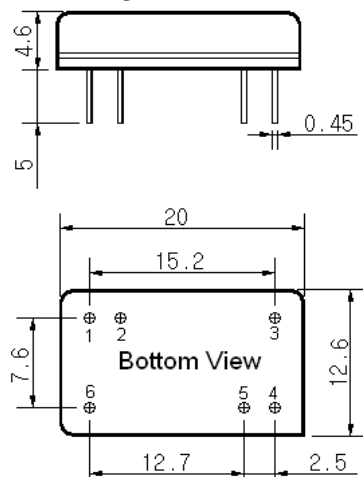

Matching Configuration

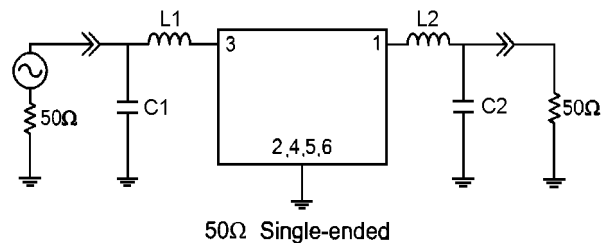

L1=15nH, L2=15nH, C1=36pF, C2=43pF
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

Rev0. 121010

