



Typical Performance

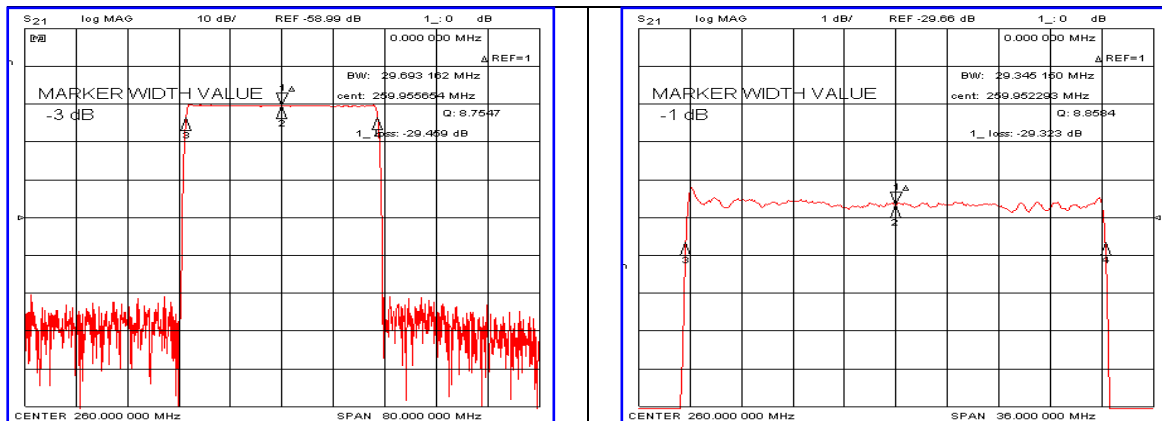

Specification


Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	260.00	-
Insertion Loss	dB	-	29.50	31.00
1dB Bandwidth	MHz	29.20	29.34	-
3dB Bandwidth	MHz	-	29.69	-
40dB Bandwidth	MHz	-	31.20	31.40
Passband Ripple($F_c \pm 14.22$ MHz)	dB	-	0.60	1.00
Group Delay Variation($F_c \pm 14.22$ MHz)	nsec	-	30	50
Absolute Delay	μ sec	-	2.50	-
Ultimate Attenuation	dB	45	50	-
Substrate Material	-	112-LiTaO ₃		
Temperature Coefficient	ppm/ $^{\circ}$ C	-20		

Package Dimension

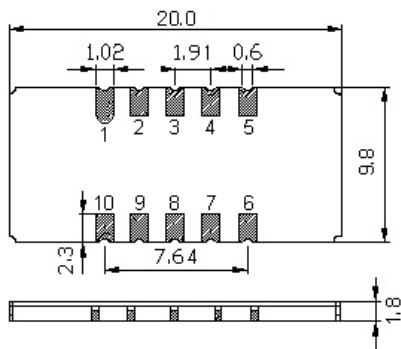

10: Input, 1: In-Gnd
 5: Output, 6: Out-Gnd
 2,3,4,7,8,9: Case Gnd

Matching Configuration

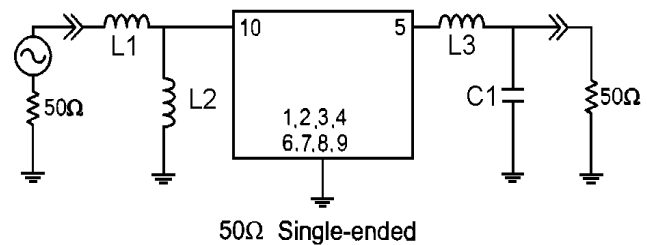

L1=12nH, L2=8.2nH, L3=15nH, C1=30pF
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

Rev0. 100720

