



### Typical Performance

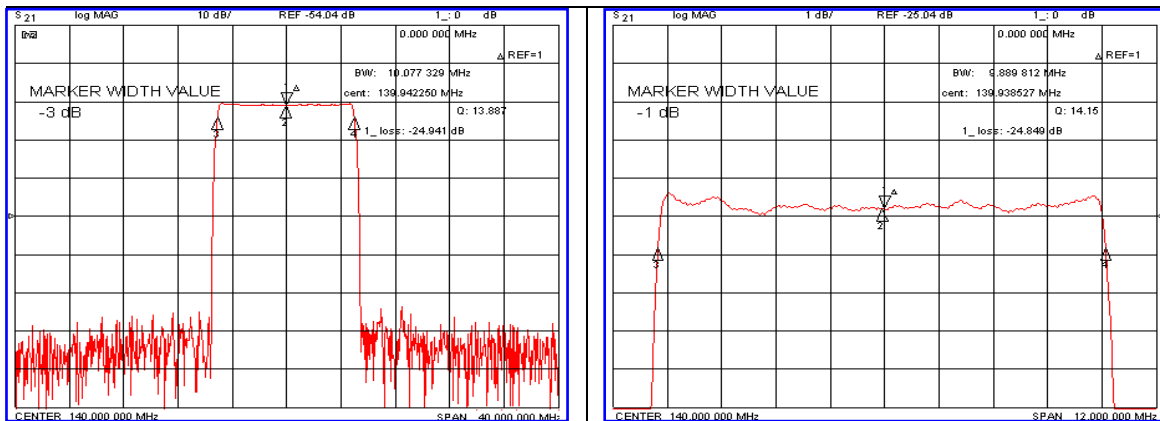


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	140.80	140.00	140.20
Insertion Loss	dB	-	25.00	26.50
1dB Bandwidth	MHz	-	9.88	-
3dB Bandwidth	MHz	9.90	10.07	-
40dB Bandwidth	MHz	-	10.89	11.00
Passband Ripple	dB	-	0.60	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	μsec	-	4.11	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	112-LiTaO <sub>3</sub>		
Temperature Coefficient	ppm/°C <sup>2</sup>	-20		

### Package Dimension

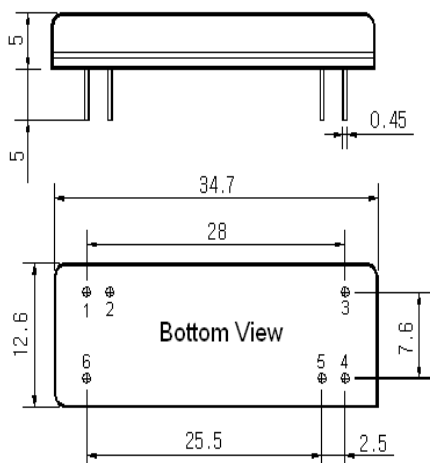

### Matching Configuration

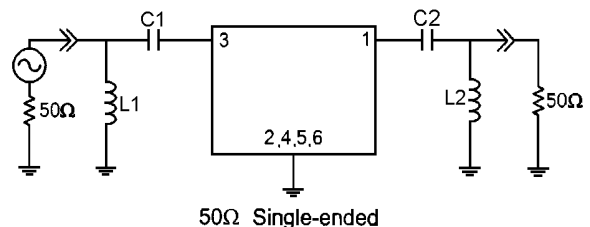

L1=L2=27nH, C1=C2=220pF  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C

Rev0. 070622

