



### Typical Performance

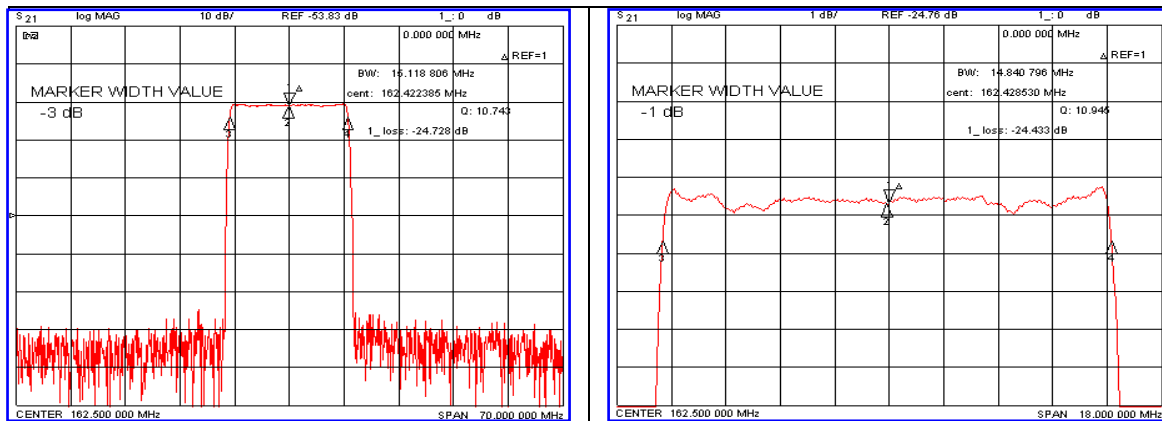


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	162.30	162.50	162.70
Insertion Loss	dB	-	24.80	26.00
1dB Bandwidth	MHz	-	14.84	-
3dB Bandwidth	MHz	15.00	15.11	-
40dB Bandwidth	MHz	-	16.32	16.50
Passband Ripple	dB	-	0.75	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	μsec	-	3.15	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	112-LiTaO <sub>3</sub>		
Temperature Coefficient	ppm/°C <sup>2</sup>	-20		

### Package Dimension

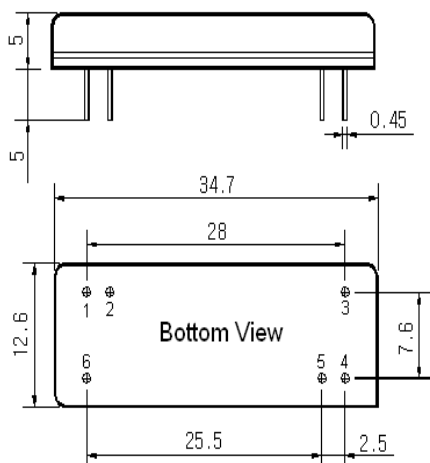

### Matching Configuration

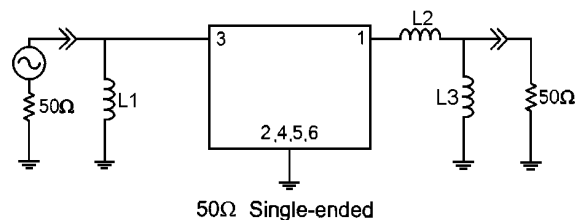

L1=18nH, L2=2.7nH, L3=18nH  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C

Rev0. 070622

