



Typical Performance

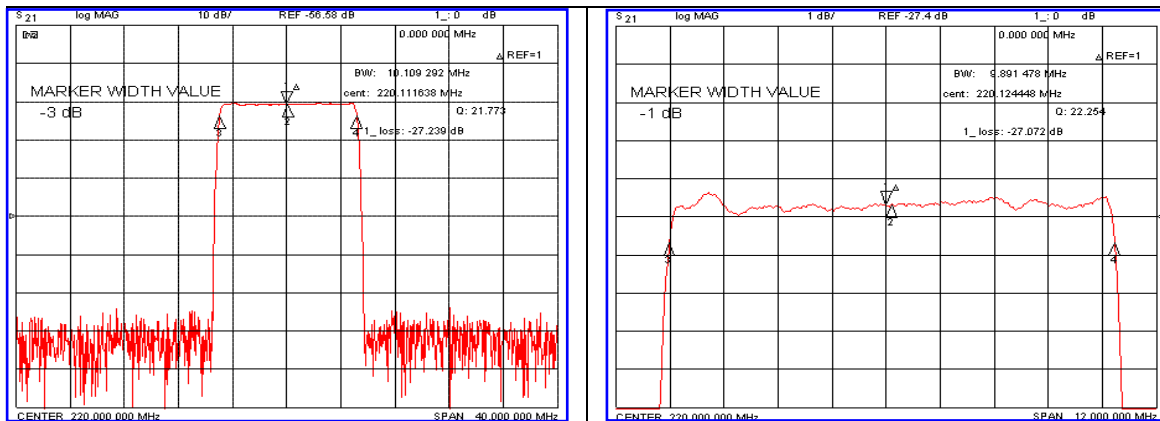


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	219.80	220.00	220.20
Insertion Loss	dB	-	27.30	29.00
1dB Bandwidth	MHz	-	9.89	-
3dB Bandwidth	MHz	10.00	10.10	-
40dB Bandwidth	MHz	-	10.99	11.10
Passband Ripple	dB	-	0.65	1.00
Group Delay Variation	nsec	-	100	200
Absolute Delay	μsec	-	4.07	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	112-LiTaO ₃		
Temperature Coefficient	ppm/°C ²	-20		

Package Dimension

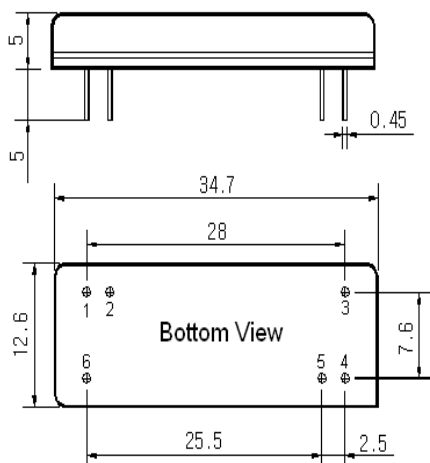

Matching Configuration

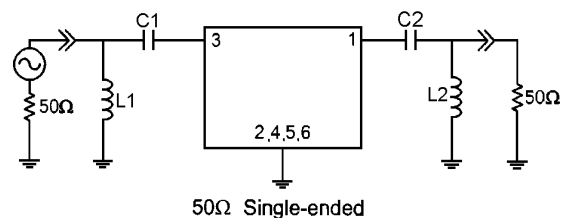

L1=L2=15nH, C1=C2=51pF
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

Rev0. 070622

