



### Typical Performance

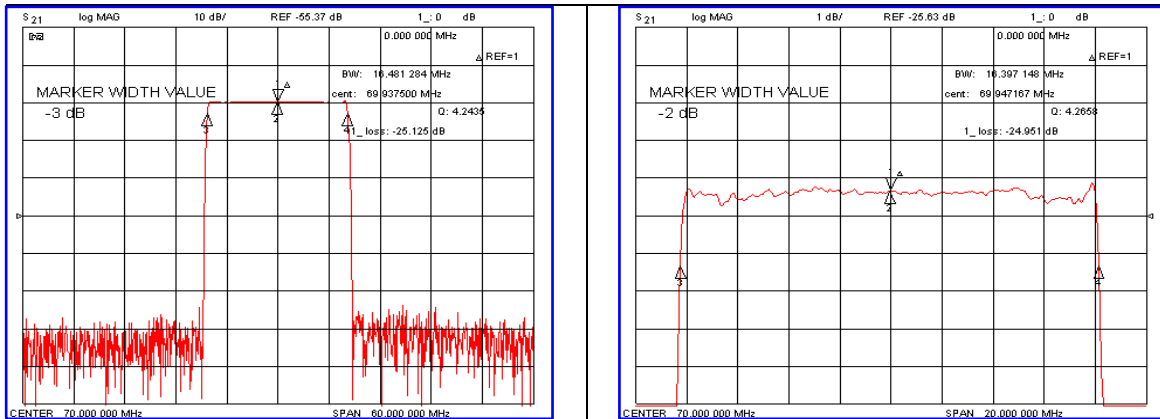


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	69.92	70.00	70.08
Insertion Loss	dB	-	25.50	27.00
2dB Bandwidth	MHz	16.30	16.39	-
25dB Bandwidth	MHz	-	17.18	17.28
40dB Bandwidth	MHz	-	17.38	17.50
Passband Ripple	dB	-	0.60	1.00
Group Delay Variation	nsec	-	50	100
Absolute Delay	usec	-	3.33	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	128-LiNbO <sub>3</sub>		
Temperature Coefficient	ppm/°C	-72		

### Package Dimension

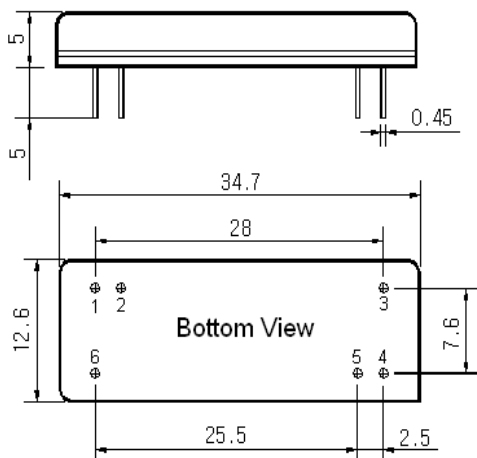

### Matching Configuration

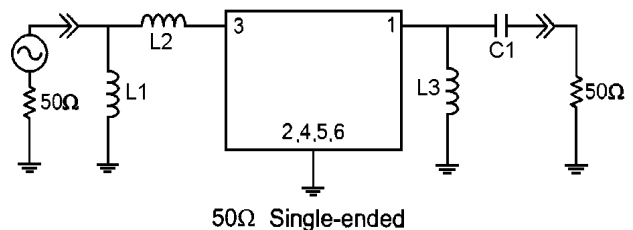

L1=150nH, L2=82nH, L3=270nH, C1=200pF  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C

Rev.0 090618

