



Typical Performance

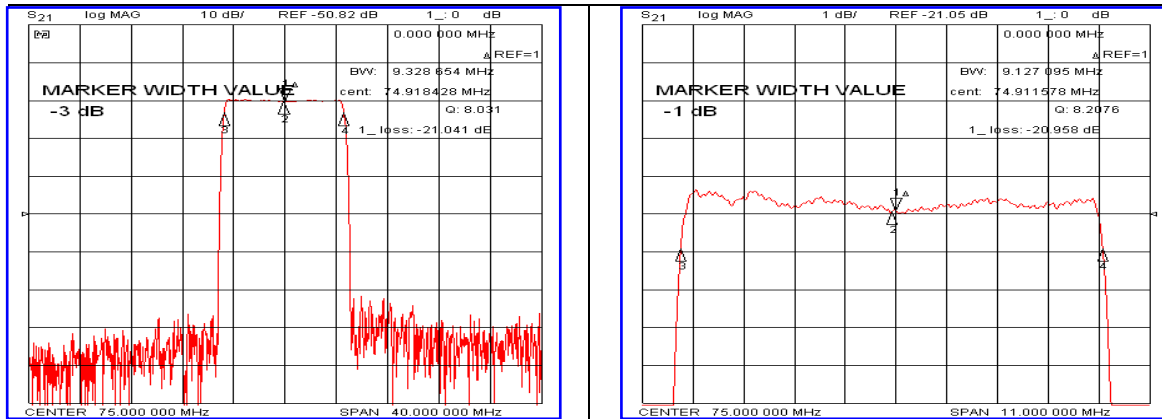


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	74.90	75.00	75.10
Insertion Loss	dB	-	21.20	23.50
1dB Bandwidth	MHz	9.00	9.12	-
3dB Bandwidth	MHz	-	9.32	-
20dB Bandwidth	MHz	-	9.93	10.05
40dB Bandwidth	MHz	-	10.20	-
Passband Ripple	dB	-	0.65	1.20
Absolute Delay	usec	-	3.50	-
Ultimate Attenuation	dB	45	50	-
Substrate Material	-	Yz-LiNbO ₃		
Temperature Coefficient	ppm/°C	-94		

Package Dimension

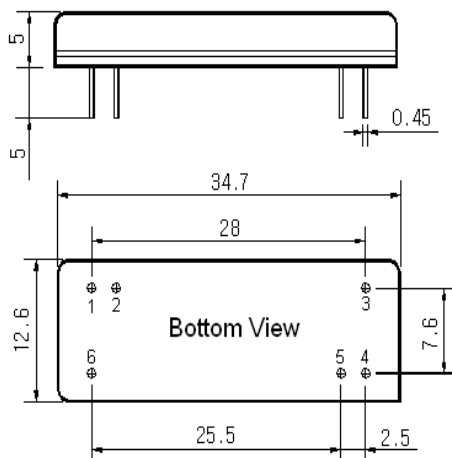

Matching Configuration

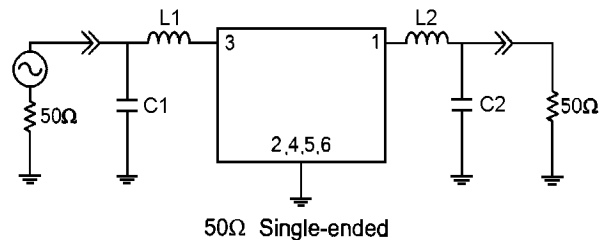

L1=82nH, L2=82nH, C1=24pF, C2=24pF
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C

Rev.0 120424

