



Typical Performance

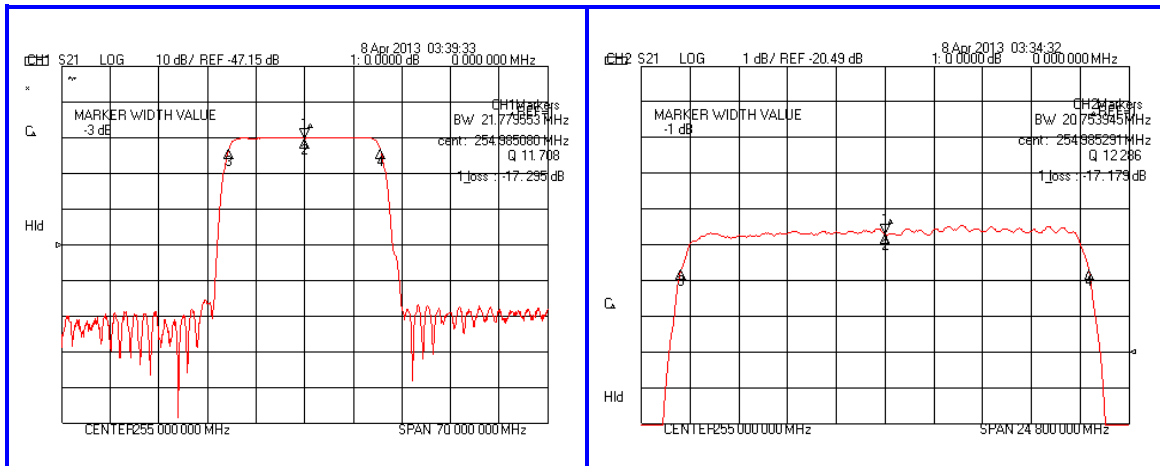


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	MHz	-	255.00	-
Insertion Loss	dB	-	17.50	19.00
1dB Bandwidth	MHz	20.30	20.75	-
3dB Bandwidth	MHz	-	21.77	-
40dB Bandwidth	MHz	-	26.55	26.80
Passband Ripple($F_c \pm 9.75$ MHz)	dB	-	0.50	1.00
Group Delay Variation($F_c \pm 9.75$ MHz)	nsec	-	70	150
Absolute Delay	μ sec	-	0.95	-
Ultimate Attenuation	dB	40	45	-
Substrate Material	-	112-LiTaO ₃		
Temperature Coefficient	ppm/ $^{\circ}$ C	-20		
Package	mm	13.3 X 6.5 (SMD)		

Package Dimension

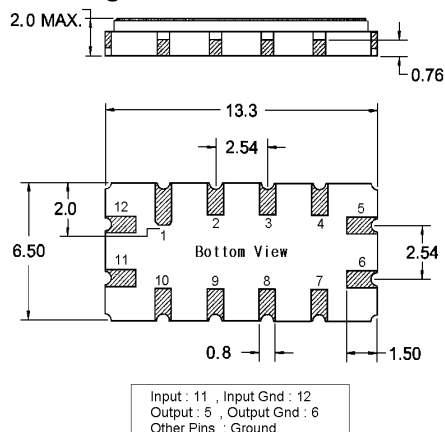

Matching Configuration

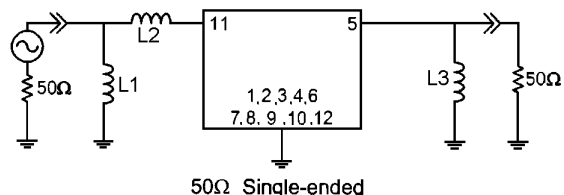

$L1=8.2$ nH, $L2=4.7$ nH, $L3=8.2$ nH
 Source / Load Impedance = 50 Ω
 Ambient Temperature = 25 $^{\circ}$ C

Rev.0 130411

